

# Catalogue 2023

English. Français. Español

The Unecol group is present in more than 40 countries, is a leader in the Plumbing Market in Spain and also has a strong presence in global Industrial, DIY and Consumer Markets.





**DOWNLOAD THIS CATALOGUE**



2023






All you need from Unecol  
at your fingertips.

Unecol à votre portée

Todo lo que necesitas de Unecol  
en tu mano y al instante


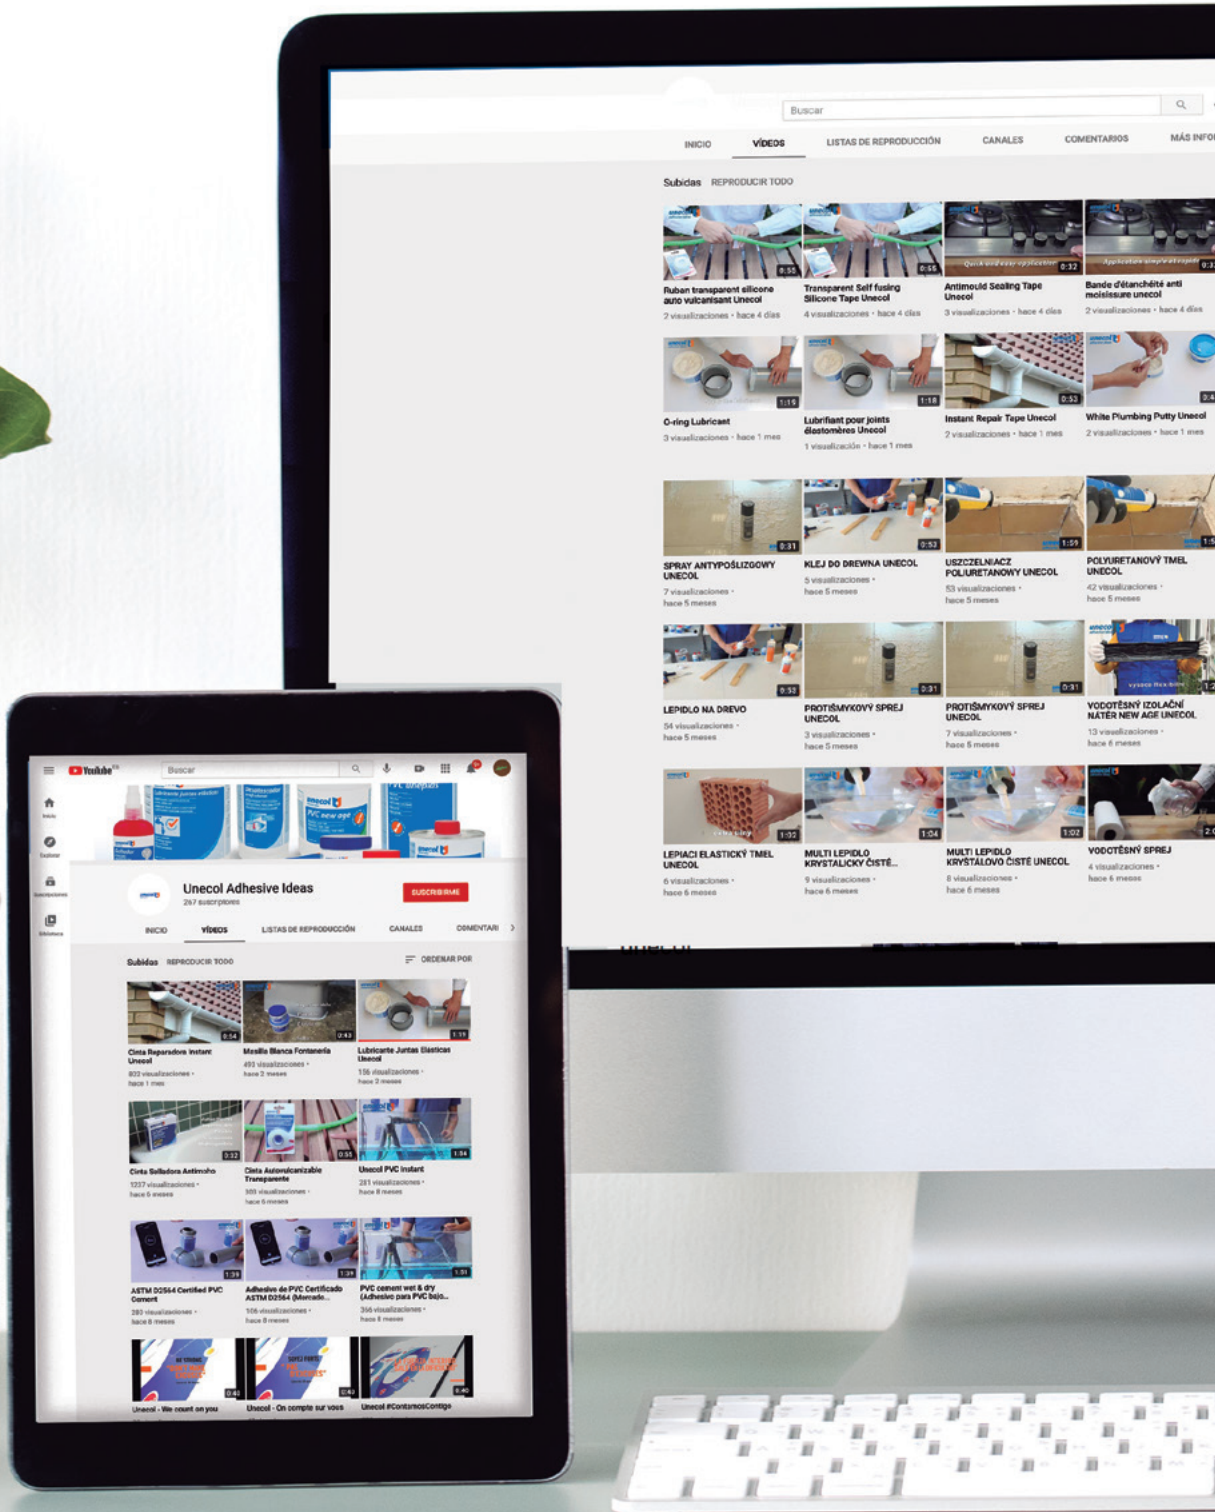


# Unecol Youtube

Follow Unecol on Youtube  
to see our latest videos.

Suivez Unecol sur Youtube  
pour voir nos dernières vidéos.

Sigue a Unecol en Youtube  
para ver nuestros últimos vídeos.

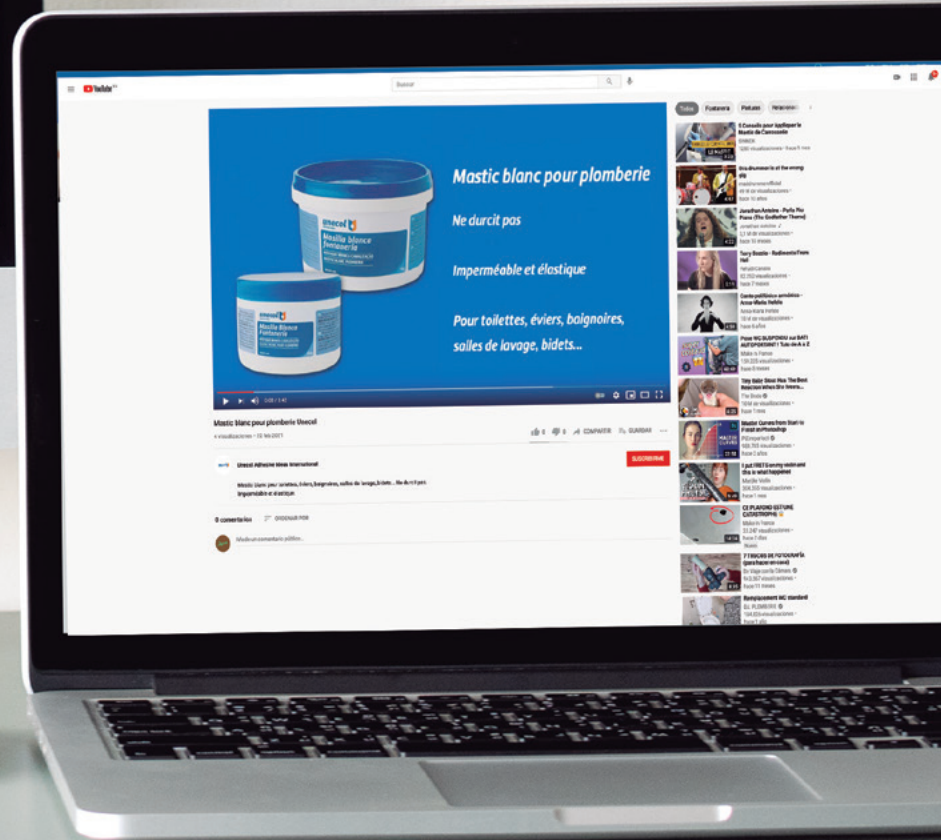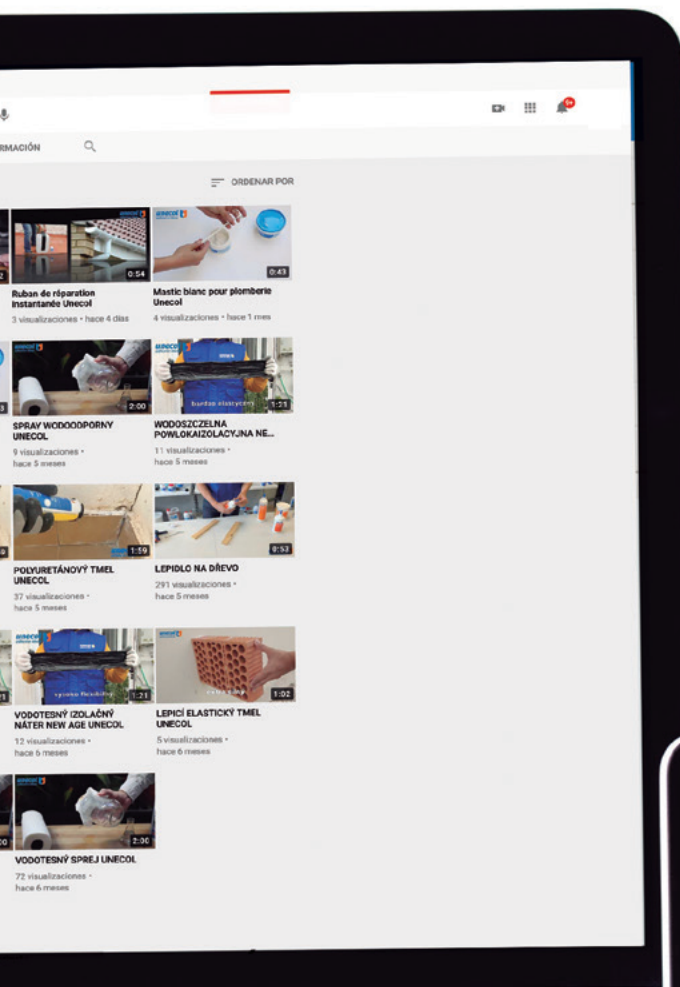



# About Us



**We are known  
and recognised  
for what we  
are and what  
we offer:  
adhesive ideas.**

**Nous sommes  
connus et  
reconnus pour  
ce que nous  
sommes et  
ce que nous  
offrons: des  
idées de collage.**

**Se nos conoce  
y reconoce por  
lo que somos y  
ofrecemos:  
ideas adhesivas.**



**50** | **unecol**   
since 1970 | adhesive ideas

**Our main competitive advantage lies in the confidence we bring to our customers, thanks to our flexibility in service and commitment to customer satisfaction, as well as our strict quality controls and compliance with international standards.**

**Notre principal avantage concurrentiel réside dans la confiance que nous apportons au client, grâce à notre flexibilité en matière de service et à notre engagement à satisfaire le client, ainsi qu'à des contrôles de qualité stricts et à des adaptations aux normes internationales.**

**Nuestra principal ventaja competitiva radica en la confianza que aportamos al cliente, gracias a nuestra flexibilidad en el servicio y el compromiso con su satisfacción, así como con los estrictos controles de calidad y ajustes a normativas internacionales.**




## Our Facilities

**Our modern installations were opened in 2007 in the industrial park in Almussafes, where many Ford factory suppliers are located.**

Our 10,230m<sup>2</sup> factory stands on a plot of 22,000m<sup>2</sup>, and is designed to ensure people's safety and to respect the environment. We are approved for the management of flammable, toxic and corrosive products, thanks to our APQ 1, 6 and 7 licences. Our 13 filling machines have a total annual capacity of 20.500.000 units. The traceability of our products is guaranteed during the entire manufacturing process, by means of a powerful ERP system and radio frequency devices, which facilitate the management of our products during all processes. We have a state-of-the-art fire-protection system, with laser detection of smoke concentration and extinguishing systems through foam cannons and automatic sectorization.





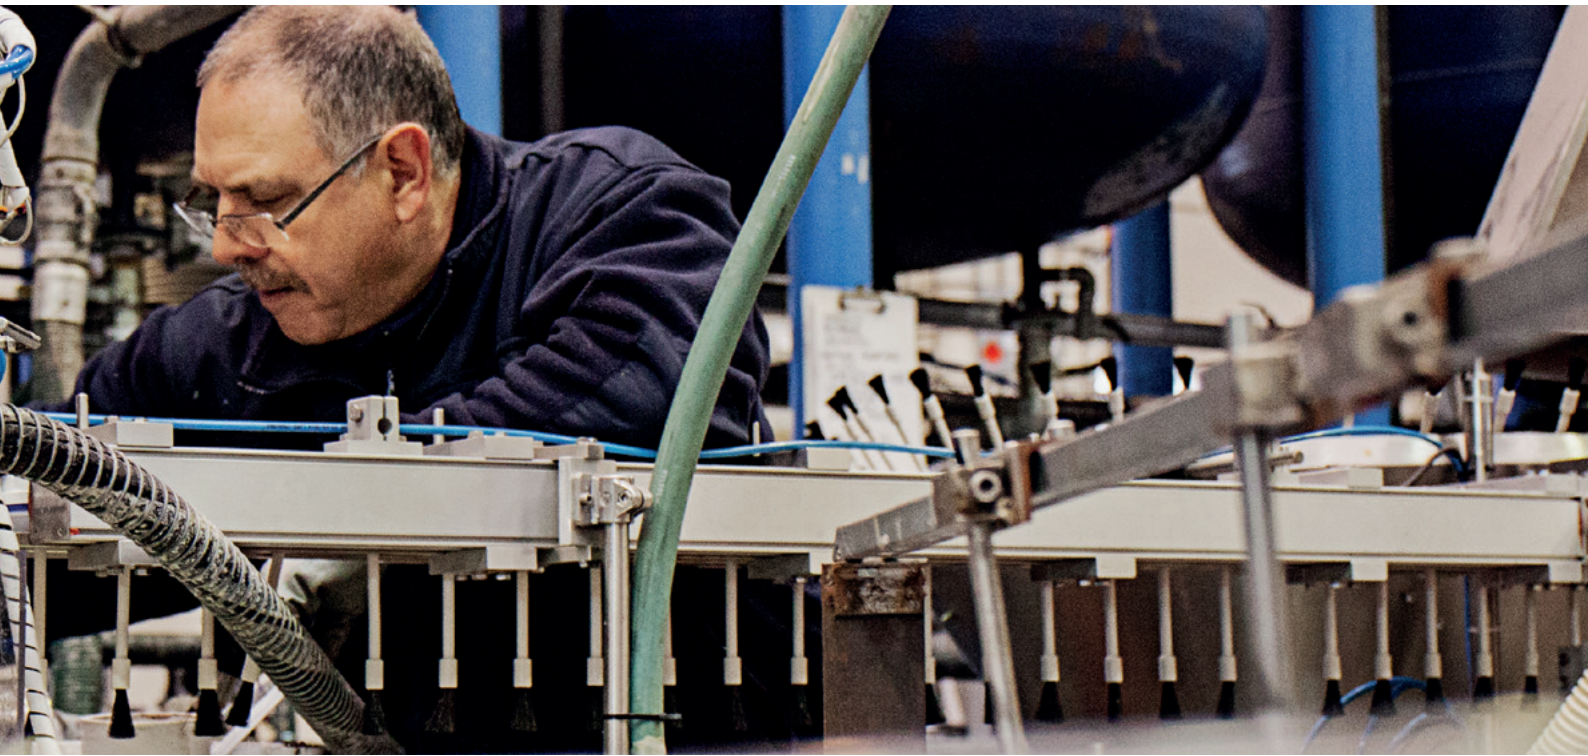

## Nos installations

**Nous disposons d'installations modernes inaugurées en 2007 et situées dans le Parc Industriel de fournisseurs de Ford à Almussafes, Valencia.**

Notre usine, qui se trouve sur une parcelle de 22.000m<sup>2</sup> et occupe une surface de 10.230m<sup>2</sup>, a été conçue afin d'assurer la sécurité des personnes et la manipulation de produits inflammables, toxiques et corrosifs grâce aux licences APQ 1, 6 et 7, dans le respect de l'environnement. L'usine est équipée de 13 machines de remplissage d'une capacité individuelle atteignant jusqu'à 20.500.000 pièces par an. La traçabilité est garantie pendant tout le processus grâce à un ERP et un système de lecteurs de code-barres à radiofréquence qui facilitent la gestion des produits à leurs différentes étapes. Nous disposons d'un système de protection anti-incendies de dernière génération, avec détection laser de la concentration de fumée et systèmes d'extinction par canons à mousse et sectorisation automatique.



## Nuestras instalaciones

**Disponemos de unas modernas instalaciones en el Parque Industrial de proveedores de Ford en Almussafes, Valencia, inauguradas en 2007.**

Sobre una parcela de 22.000m<sup>2</sup> y una superficie de 10.230m<sup>2</sup> se levanta nuestra fábrica, con una filosofía constructiva orientada a la seguridad de las personas, respetuosa con el medio ambiente y legalizada para la manipulación de productos inflamables, tóxicos y corrosivos, gracias a las licencias APQ 1, 6 y 7. Consta de 13 máquinas de envasado diferentes con capacidades individuales de hasta 20.500.000 unidades al año. La trazabilidad está garantizada durante todo el proceso mediante un potente ERP y un sistema de pistolas de radiofrecuencia, que facilitan la gestión de los productos en sus diferentes procesos. Actualmente, somos la única empresa con fabricación propia de cianoacrilato en España. Contamos con un sistema de protección contra incendios de última generación, con detección laser de concentración de humos y sistemas de extinción mediante cañones de espuma y sectorización automática.

# Certificados de Calidad Quality Certificates Certificats de Qualitat



ISO 9001



ISO 14001



WRAS



CSTB



MARCA DO CE



KITEMARK



KOMO



ASTM D2564

Certificado ES106220

El sistema de gestión de

**GRUPO UNECOL**

Parque Industrial Juan Carlos I, Avda. de la Faja, nº 44, 46140 Almusafes (Valencia)

ISO 9001:2008

Para los siguientes productos

Diseño, producción y distribución de adhesivos y sellantes.

El sistema de gestión de calidad UNECOL ADHESIVE IDEAS, S.L. ha sido evaluado y certificado en cumplimiento de los requisitos de la norma ISO 9001:2008.

Este certificado es válido desde el 26 de julio de 2015 hasta el 24 de junio de 2018. Edición 4. Certificado desde junio de 2006.

IAF ENAC

SGS

Certificado ES106221

El sistema de gestión de

**UNECOL ADHESIVE IDEAS, S.L.**

Parque Industrial Juan Carlos I, Avda. de la Faja, nº 44, 46140 Almusafes (Valencia)

ISO 14001:2004

Para los siguientes productos

Diseño, producción y distribución de adhesivos y sellantes.

El sistema de gestión ambiental UNECOL ADHESIVE IDEAS, S.L. ha sido evaluado y certificado en cumplimiento de los requisitos de la norma ISO 14001:2004.

Este certificado es válido desde el 26 de julio de 2015 hasta el 24 de junio de 2018. Edición 4. Certificado desde junio de 2006.

IAF ENAC

SGS

Approved Number: MS2043  
Test Report: MAT148 1814

19<sup>th</sup> June 2016

UNECOL ADHESIVE IDEAS, S.L.  
Avda. de la Faja, 44,  
46140 Almusafes,  
Spain

Water Regulators Advisory Scheme Ltd. (WRAS)  
Approved Material

Water Regulators Advisory Scheme Ltd.  
Unit 13,  
Welford Road,  
Park Farm Industrial Estate,  
Cusick,  
Gwent,  
NP23 5DD

WATER REGULATORS ADVISORY SCHEME LTD. (WRAS)  
MATERIAL APPROVAL

The material referred to in this letter is subject to control with reference water for domestic purposes having met the requirements of BS6841 (2000) and/or BS7445 (2011) suitability of materials products for use connected with water treated for human consumption with regard to their effect on the quality of the water.

The reference relates solely to its effect on the quality of the water with which it may come into contact and does not signify the approval of its mechanical or physical properties for any use.

SOLVENT CEMENTS

UNECOL PVC New Age Solvent Cement: Trademark, solvent free polypropylene adhesive cement. Apply after joint cement to achieve a wet film thickness of approx. 150µm before allowing to cure for 24 hours at 23°C. For use with water up to 65°C. The material is only approved for the serving conditions that appear on the Approval. If the serving conditions are varied from those specified on the approval then the material is not covered by the scope of the approval.

APPROVAL NUMBER: 1818342

APPROVAL HOLDER: UNECOL ADHESIVE IDEAS, S.L.

The Scheme reserves the right to suspend approval.

Approval 1818342 is valid between March 2016 and March 2021

An entry as above, will automatically be included in the Water Fittings Directory on-line under the section headed, "Materials which have passed the tests of effect on water quality".

The Directory may be found at [www.wrass.co.uk/Directory](http://www.wrass.co.uk/Directory)

Yours faithfully

John Farrell  
Advisory & Register Manager  
Water Regulators Advisory Scheme

bsi. Kitemark™ Licence

This is to certify that:

**GYMCO, S.A.**  
P.I. Rey Juan Carlos I  
Av. de la Faja, 44  
Almusafes  
Valencia  
46140  
Spain

Holds Kitemark Licence Number: **KM 589269**

In respect of **BS EN 14680**  
Adhesives for non pressure thermoplastic-piping systems

This issues the right and Licence to use the Kitemark in accordance with the Kitemark Terms and Conditions governing the use of the Kitemark, as may be updated from time to time by BSI Assurance UK Ltd (the "Conditions"). All defined terms in this Licence shall have the same meaning as in the Conditions.

The use of the Kitemark is authorized in respect of the Product(s) detailed on this Licence provided at or from the above address.

For and on behalf of BSI: *Gary Fenton, Global Assurance Director*

First issued: 24/01/2013 Latest Issue: 24/01/2013

Page 1 of 2

...making excellence a habit™

No. KM 589269

**BS EN 14680:2006 - Adhesives for non-pressure thermoplastic piping systems.**

The certified adhesive may be sold under the following trade names and is for use on PVC-U non-pressure systems:

**GYMCO, PVC GF  
UNEPHAS GEL  
PVC TF7000  
PVC TF5000**

Intended use of the adhesive

To join the components of thermoplastic piping systems for fluids under zero pressure and not in contact with water intended for human consumption.

First issued: 24/01/2013 Latest Issue: 24/01/2013

Page 2 of 2

KOMO® Quality declaration

Number: K451203 Region: K451202

Issue: 2015-01-01 Date: 2015-03-01

Valid until: Indefinite Page: 1 of 2

Adhesives for joints in plastics piping systems for sewerage inside buildings

**Gymcol S.A.**

STATEMENT BY KOMO

This quality declaration for product certification is issued on the basis of BS EN 14680:2006 "Adhesives for joints in plastic piping systems for sewerage inside buildings". BS EN 14680:2006 included amendments dated 31 December 2014 in accordance with the following regulations for Product Certification.

The quality system and the product characteristics of adhesives for joints in plastic piping systems for sewerage inside buildings are controlled periodically.

Based on that, KIMO declares that appropriate confidence exists that the adhesives for joints in plastic piping systems for sewerage inside buildings, delivered by the certificate holder at the moment of delivery fulfill the requirements of the here mentioned technical specification. In case that adhesives for joints in plastic piping systems for sewerage inside buildings have been marked with the KOMO® mark in the way described in the Quality declaration.

The essential requirements, as given in the European standard applicable, are not part of this declaration.

*G. Herrera*  
Boris Herrera  
KIMO

The certificate is listed in the overview on the website of BSI Group KOMO: [www.kimo.nl](http://www.kimo.nl)  
Advice: consult [market@kimo.nl](mailto:market@kimo.nl) in order to ensure that the certificate is still valid.

Holder of Certificate: **Programa Industrial Juan Carlos I, Avda de la Faja, 44, 46140 Almusafes (ES), (VALENCIA)**  
F: +34 - 902 305 432  
E: [info@kimo.nl](mailto:info@kimo.nl)  
W: [www.kimo.nl](http://www.kimo.nl)

Evaluation to Quality system product Public Inspection

bsi. Kitemark™ Licence

This is to certify that:

**GYMCO, S.A.**  
P.I. Rey Juan Carlos I  
Av. de la Faja, 44  
Almusafes  
Valencia  
46140  
Spain

Holds Kitemark Licence Number: **KM 610056**

In respect of **BS EN 14814**  
Adhesives for thermoplastic piping systems for fluids under pressure

This issues the right and Licence to use the Kitemark in accordance with the Kitemark Terms and Conditions governing the use of the Kitemark, as may be updated from time to time by BSI Assurance UK Ltd (the "Conditions"). All defined terms in this Licence shall have the same meaning as in the Conditions.

The use of the Kitemark is authorized in respect of the Product(s) detailed on this Licence provided at or from the above address.

For and on behalf of BSI: *Gary Fenton, Global Assurance Director*

First issued: 16/09/2014 Latest Issue: 16/09/2014

Page 1 of 2

...making excellence a habit™

No. KM 610056

**BS EN 14814:2007 - Adhesives for thermoplastic piping systems for fluids under pressure.**

The certified product may be sold under the following trade names:

**GYMCO, PVC TF --  
UNEPHAS GEL  
PVC TF7000  
PVC TF5000**

The manufacturer has stated that the adhesive listed is intended for a PVC-U pressure system.

Intended use of the adhesive - to join the components of thermoplastic piping systems for fluids under pressure and not in contact with water intended for human consumption.

First issued: 16/09/2014 Latest Issue: 16/09/2014

Page 2 of 2

CSSTB / Organisme certificateur Certification body

**Certificat**

Adhésifs pour canalisations thermoplastiques

Pour l'usage prévisible

**UNECOL PVC GEL**

La CSSTB atteste que le produit ci-dessus est conforme à des caractéristiques décrites dans le référentiel de certification CE 15 - Adhésifs pour canalisations thermoplastiques en vigueur, après évaluation selon les méthodes de contrôle définies dans ce référentiel.

En vertu de la présente attestation, la CSSTB approuve :

Le produit: **UNECOL S.L.**

Site: **Parque Industrial Juan Carlos I, Avda de la Faja, 44 - ES - 46140 ALMUSAFES (VALENCIA) ES - 46140 ALMUSAFES (VALENCIA)**

Le motif d'usage de la norme CE 15 Adhésifs pour canalisations thermoplastiques pour le produit objet de cette attestation, pour faire la preuve de validité et dans les conditions prévues par les règlements nationaux de la marque CE et le référentiel mentionné ci-dessus.

14-4262

Déclaration de reconnaissance n° 223-14-4262 du 22 juin 2010.

Cette déclaration est soumise à la décision de reconnaissance n° 222-14-4262 du 18 décembre 2010.

Le présent certificat, accompagné de modifications, est certifié en valide. Le certificat est valide pour être utilisé sur le site internet <http://www.certificat.csstb.fr> pour en vérifier la validité.

Caractéristiques certifiées

Selon la norme NF EN 14814 :

- Résistance au cisaillement à 23°C :
  - o (0,44N x 11) = 4,84N
  - o (1,78N x 2,14) = 3,81N
  - o (7,33N x 2,1) = 15,39N
- Temps de prise à l'adhésion à 23°C : + 24 à 10 minutes
- Temps à la prise à long terme à 23°C : + 180 à 181 jours
- Temps à la prise à long terme à 45°C : + 180 à 181 jours
- Durée de conservation - Réaction au cisaillement sur joints collés : + 1,5 ans

Autres caractéristiques :

- Effort sec
- Taux de retrait
- Quantité de résine
- Quantité de solvant
- Réaction à 23°C

Le motif de certification et la réglementation française relative aux matériaux en contact de fluide destinés à la consommation humaine (Article 51 de l'Article 29 du 1987 décret) sont respectés, le produit est conforme à ces normes.

Détails de l'usage :

- Réaction de distribution dans une pression, 3 à 10 bar et de l'adhésion
- Réaction d'adhésion dans des conditions de pression de service 7 - 10 bar et de l'adhésion
- Réaction de distribution dans des conditions de pression de service 7 - 10 bar et de l'adhésion
- Réaction d'adhésion dans des conditions de pression de service 7 - 10 bar et de l'adhésion
- Réaction d'adhésion dans des conditions de pression de service 7 - 10 bar et de l'adhésion
- Réaction d'adhésion dans des conditions de pression de service 7 - 10 bar et de l'adhésion

CSSTB CERTIFICATION DE PRODUITS EN NORMES

16 rue Jean-Jacques - Caspary Centre - 77177 Marolles-en-Brie Cedex 2  
Tel : +33 (0)2 14 64 82 12 - Fax : +33 (0)2 14 64 82 13 - www.csstb.fr  
MARQUE LAUSANNE / FRANCE / SUISSE / ITALIE / SPAIN / PORTUGAL

## PVC New Age

THF-free formula for rigid PVC in pressure (PN16) and waste systems.  
High viscosity.

Colle PVC sans THF, pour PVC rigide dans les installations d'évacuation ou sous pression (PN16). Haute viscosité.

Adhesivo para tubería de PVC rígido y sistemas de presión (PN16).  
Alta viscosidad.



2228



2228	Plastic pot 1 L with brush	12*/box	8414646222801
2229	Plastic pot 500 ml with brush	20*/box	8414646222900
2243	Plastic tube 125 ml with euroslot	30/box	8414646224300
2272	Plastic pot 250 ml with brush	24*/box	8414646227202
2286	Metal can 1L without brush	12*/box	8414646228605
2518	Plastic tube 60 ml with euroslot	30/box	8414646251801

\* In shrink-wrapped tray



2286



2229



2272



2518

2243

# PVC Uneplas

For rigid PVC in pressure (PN16) and waste systems.  
Moderately fast setting. Suitable for large diameters.

Colle PVC pour installations d'évacuation ou sous pression (PN16).  
Prise modérément rapide. Convient aux grands diamètres.

Para PVC rígido con presión (PN16) y sistemas  
de evacuación. Secado moderado. Apto para grandes diámetros.



2002	Metal can 250 ml with brush	24*/box	8414646200205
2009	Plastic pot 1 L with brush	12*/box	8414646200908
2010	Plastic pot 250 ml with brush	24*/box	8414646201004
2023	Plastic pot 500 ml with brush	24*/box	8414646202308
2026	Aluminium tube 125 ml with individual box and display box	96/box	8414646202698
2028	Aluminium tube 125 ml with individual box	30/box	8414646202896
2040	Metal can 1 L with brush	12*/box	8414646204005
2041	Metal can 500 ml with brush	12*/box	8414646204104
2042	Metal can 1 L without brush	12*/box	8414646204203
2043	Metal can 500 ml without brush	12*/box	8414646204302
2073	Aluminium tube 125 ml	50/box	8414646207303
2942	Metal Can 2,5 L	2/box	8414646294204

\* In shrink-wrapped tray



2040

2009



2028



2073



2026



2002



2042



2043



2010



2041



2040



2942

NUEVO  
NEW

# PVC Pegafor

Classic formula for rigid PVC in pressure (PN16) and waste systems.  
Fast-setting.

Formule classique pour PVC rigide dans les installations d'évacuation.  
ou sous pression (PN16). Prise rapide.

Fórmula clásica para PVC rígido con presión (PN16) y  
sistemas de evacuación. Rápido.



2046



2024	Aluminium tube 125 ml with individual box and display box	96*/box	8414646202490
2046	Metal can 1 L with brush	12*/box	8414646204609
2047	Metal can 500 ml with brush	12*/box	8414646204708

\* In shrink-wrapped tray



2047




2024

# PVC G-10

For rigid PVC in pressure systems up to PN16 and waste systems. THF-free.

Colle pour installations en PVC rigide sous pression jusqu'à PN16 et évacuation. Sans THF.

Para PVC rígido con presión hasta PN16 y sistemas de evacuación. Sin THF.



2062

2056	Metal can 250 ml with brush	24*/box	8414646205606
2060	Aluminium tube 125 ml	50/box	8414646206009
2062	Metal can 1 L with brush	12*/box	8414646206207
2063	Metal can 500 ml with brush	12*/box	8414646206306
2072	Metal can 500 ml without brush	12*/box	8414646207204
2076	Metal can 1 L without brush	12*/box	8414646207600




2056



2063



2072



2076



2060

## PVC Gel

THF-free GEL non-drip formula for rigid PVC in pressure (PN16) and waste systems. Also suitable for use on ABS. Fast-setting.

Colle GEL sans THF - Pour les installations en PVC rigide sous pression (PN16). Convient aussi pour l'ABS. Ne goute pas. Prise rapide.

Adhesivo en GEL sin THF para PVC rígido en sistemas de presión hasta PN16 y sistemas de evacuación. Válido para ABS. No gotea. Rápido.



2044	Plastic pot 500 ml with brush	20*/box	8414646204401
2045	Plastic pot 1 L with brush	12*/box	8414646204500
2289	Plastic pot 250 ml with brush	24*/box	8414646228902
2961	Plastic pot 500 ml with brush	20*/box	8414646296109

\* In shrink-wrapped tray

## PVC Instant

Blue GEL formula for rigid and flexible PVC pipes in pressure systems up to PN16. Suitable for use on ABS. Widely used in the swimming pool industry. Resistant to water treatment products and chlorine. Contains THF. Extremely fast-setting.

Colle PVC GEL bleue, pour tubes en PVC rigide et flexible jusqu'à PN16. Convient aussi pour l'ABS. Souvent employée dans le secteur de piscines. Résistante aux eaux traitées et chlorées des piscines. Contient du THF. Prise très rapide.

Para PVC rígido y flexible especial piscinas (PN16). También válido para ABS. Resistente a aguas tratadas y cloro en piscinas. Contiene THF. Muy rápido.



2575




2011	Metal can 250 ml with brush	24*/box	8414646201103
2053	Metal can 500 ml with brush	12*/box	8414646205309
2575	Plastic tube 125 ml	30/box	8414646257506

\* In shrink-wrapped tray



## PVC Express



Extra fast solvent cement for PVC pipes, accessories, joints and profiles. Suitable for use on ABS and material for swimming pools, such as skimmers.

Colle PVC extrêmement rapide pour tubes, accessoires et profilés de PVC. Convient aussi pour l'ABS, ainsi que les matériaux de piscines comme les skimmers.

Adhesivo extra rápido para accesorios, tuberías y juntas de perfiles de carpintería de PVC. Válido también para ABS y materiales de piscinas como skimmers.



2074	Tube 125 ml	30/Box	8414646207495
------	-------------	--------	---------------

2074



## CPVC Pro



Fast, thixotropic C-PVC cement for hot water installations up to 95°C.

Colle C-PVC. Thixotrope à prise rapide. Pour les installations d'eau chaude jusqu'à 95°C.

Pegamento para CPVC tixotrópico especial para usar en tuberías rígidas de CPVC para agua caliente hasta 95°C.

	Plastic pot with brush, 250 ml		
	Plastic pot with brush, 500 ml		
	Plastic pot with brush, 1 L		



## PVC Cement REGULAR ASTM

For schedule 40 ≤ 4", for Schedule 80 ≤ 2" pipes.

Pour tubes schedule 40 ≤ 4", et pour tubes schedule 80 ≤ 2".

Para tubería schedule 40 ≤ 4", para schedule 80 ≤ 2".



ASTM D2564



PW-DWV-SW

	Metal can with cotton ball applicator, 118ml (4 fl.oz. 1/4 pint), CLEAR / TRANSPARENTE	24/box
2986	Metal can with cotton ball applicator, 237ml (8 fl.oz. 1/2 pint), CLEAR / TRANSPARENTE	24/box
2987	Metal can with cotton ball applicator, 473ml (16 fl.oz. 1 pint), CLEAR / TRANSPARENTE	12/box
2988	Metal can with cotton ball applicator, 946ml (32 fl.oz. 1 quart), CLEAR / TRANSPARENTE	12/box

## PVC Cement MEDIUM ASTM

For schedule 40 and schedule 80 ≤ 6".

Pour tubes Schedule 40 et Schedule 80 ≤ 6".

Para tubería schedule 40 y schedule 80 ≤ 6".



2937



ASTM D2564



PW-DWV-SW

2908	Metal can with cotton ball applicator, 118ml (4 fl.oz. 1/4 pint) CLEAR / TRANSPARENTE	24/box
2907	Metal can with cotton ball applicator, 237ml (8 fl.oz. 1/2 pint) CLEAR / TRANSPARENTE	24/box
2906	Metal can with cotton ball applicator, 473ml (16 fl.oz. 1 pint) CLEAR / TRANSPARENTE	12/box
	Metal can with cotton ball applicator, 946ml (32 fl.oz. 1 quart) CLEAR / TRANSPARENTE	12/box
2946	Metal can with cotton ball applicator, 118ml (4 fl.oz. 1/4 pint) GRAY / GRIS	24/box
2945	Metal can with cotton ball applicator, 237ml (8 fl.oz. 1/2 pint) GRAY / GRIS	24/box
2944	Metal can with cotton ball applicator, 473ml (16 fl.oz. 1 pint) GRAY / GRIS	12/box
	Metal can with cotton ball applicator, 946ml (32 fl.oz. 1 quart) GRAY / GRIS	12/box

## PVC Cement HEAVY ASTM

For schedule 40 ≤ 18", for schedule 80 ≤ 12".

Pour tubes schedule 40 ≤ 18", et pour tubes schedule 80 ≤ 12".

Para tubería schedule 40 ≤ 18", para tubería schedule 80 ≤ 12".

2904



2903



ASTM D2564



PW-DWV-SW

2905	Metal can with cotton ball applicator, 118ml (4 fl.oz. 1/4 pint), CLEAR / TRANSPARENTE	24 /box
2904	Metal can with cotton ball applicator, 237ml (8 fl.oz. 1/2 pint), CLEAR / TRANSPARENTE	24 /box
2903	Metal can with cotton ball applicator, 473ml (16 fl.oz. 1 pint), CLEAR / TRANSPARENTE	12 /box
2937	Metal can with cotton ball applicator, 946ml (32 fl.oz. 1 quart), CLEAR / TRANSPARENTE	12 /box
	Metal can with cotton ball applicator, 118ml (4 fl.oz. 1/4 pint), GRAY / GRIS	24 /box
2932	Metal can with cotton ball applicator, 237ml (8 fl.oz. 1/2 pint), GRAY / GRIS	24 /box
2581	Metal can with cotton ball applicator, 473ml (16 fl.oz. 1 pint), GRAY / GRIS	12 /box
2936	Metal can with cotton ball applicator, 946ml (32 fl.oz. 1 quart), GRAY / GRIS	12 /box

## PVC Cement wet & dry MEDIUM ASTM

For schedule 40 and schedule 80  $\leq 6''$ . Medium-bodied, for use in humid conditions. Suitable for use on flexible PVC pipes.

Pour tubes Schedule 40 et Schedule 80  $\leq 6''$ . Viscosité moyenne, pour utilisation dans des conditions humides. Convient pour tubes flexibles en PVC.

Para tubería schedule 40 y schedule 80  $\leq 6''$ . Viscosidad media. Uso en condiciones húmedas. Apto para PVC flexible.

ASTM D2564



PW-DWV-SW

2911	Metal can with cotton ball applicator, 118ml (4 fl.oz. 1/4 pint), BLUE / AZUL	24 /box
2910	Metal can with cotton ball applicator, 237ml (8 fl.oz. 1/2 pint), BLUE / AZUL	24 /box
2909	Metal can with cotton ball applicator, 473ml (16 fl.oz. 1 pint), BLUE / AZUL	12 /box
2984	Metal can with cotton ball applicator, 946ml (32 fl.oz. 1 quart), BLUE / AZUL	12 /box



2910

## CPVC Cement MEDIUM ASTM

For all schedules and classes of CPVC pipe and fittings  $\leq 6''$  with interference fit. Medium-bodied CPVC cement for hot water installations up to 180°F (82°C).

Pour tous schedules de tubes et raccords en CPVC  $\leq 6''$ . Colle C-PVC de viscosité moyenne pour installations d'eau chaude jusqu'à 180°F (82°C).

Para toda presión hidráulica en tuberías de CPVC  $\leq 6''$  con interferencia. Cemento de CPVC de viscosidad media para instalaciones de agua caliente hasta 180°F (82°C).

ASTM F493



PW-DWV-SW

	Metal can with cotton ball applicator, 118ml (4 fl.oz. 1/4 pint), ORANGE / NARANJA	24 /box
	Metal can with cotton ball applicator, 237ml (8 fl.oz. 1/2 pint), ORANGE / NARANJA	24 /box
	Metal can with cotton ball applicator, 473ml (16 fl.oz. 1 pint), ORANGE / NARANJA	12 /box
	Metal can with cotton ball applicator, 946ml (32 fl.oz. 1 quart), ORANGE / NARANJA	12 /box



## CPVC Cement HEAVY ASTM

For all schedules and classes of CPVC pipe and fittings  $\leq 12''$  with interference fit. Heavy-bodied CPVC cement for hot water installations up to 180°F (82°C).

Pour tous schedules de tubes et raccords en CPVC  $\leq 12''$ . Colle C-PVC de haute viscosité pour installations d'eau chaude jusqu'à 180°F (82°C).

Para toda presión hidráulica en tuberías de CPVC  $\leq 12''$  con interferencia. Adhesivo de CPVC de viscosidad alta/heavy para instalaciones de agua caliente hasta 180°F (82°C).

ASTM F493



PW-DWV-SW

	Metal can with cotton ball applicator, 118ml (4 fl.oz. 1/4 pint), ORANGE / NARANJA	24 /box
	Metal can with cotton ball applicator, 237ml (8 fl.oz. 1/2 pint), ORANGE / NARANJA	24 /box
	Metal can with cotton ball applicator, 473ml (16 fl.oz. 1 pint), ORANGE / NARANJA	12 /box
	Metal can with cotton ball applicator, 946ml (32 fl.oz. 1 quart), ORANGE / NARANJA	12 /box



## Adhesive for PVC sheeting Colle pour bâches PVC Adhesivo para sellado de láminas de PVC



4017

Adhesive for PVC sheeting in construction. Colourless. Fast-drying. Suitable for outdoor use. Creates flexible joints with resistance to damp, hot and cold conditions.

Colle pour couvertures en PVC pour construction. Incolore. Séchage rapide. Apte pour l'extérieur. Unions flexibles et résistantes à l'humidité, le froid et la chaleur.

Sellado de laminas de PVC de cubiertas en construccion. Incoloro. Secado rapido. Apto para exteriores. Uniones flexibles y resistentes a la humedad, frio y calor.



4018

4017	Metal can 1 L without brush	12*/box	8414646401701
4018	Metal can 500 ml without brush	12*/box	8414646401800

## Pipe insulation adhesive Colle pour manchons isolants Adhesivo para coquillas




3228

3229

Adhesive for bonding flexible pipe insulation materials (Armaflex, Climaflex, Tubex, etc).

Colle contact pour manchons isolants (Armaflex, Climaflex, tubex, etc).

Adhesivo de contacto para encolado de planchas y coquillas de revestimientos termicos flexibles (Armaflex, Climaflex, Tubex, etc).



3228	Metal can 1 L with brush	12*/box	8414646322808
3229	Metal can 500 ml with brush	12*/box	8414646322907

\* In shrink-wrapped tray

## Vinyl adhesive for air-conditioning ducts and geotextile Colle vinylique pour conduits de climatisation et géotextile Cola conductos de aire acondicionado. Cola geotextil piscinas



5027

Vinyl adhesive for fibre-glass circuits in air-conditioning ducts. Also suitable for assembling geotextile liner pads in swimming pools. Solvent-free, antibacterial and anti-fungal.

Colle vinylique pour l'imprégnation de conduits de fibre de verre dans les installations de climatisation. Convient aussi pour le collage de feutrine de piscine. Sans solvants, antibactérien et anti fongique.

Cola vinilica para conductos de fibra de vidrio en instalaciones de aire acondicionado. Cola vinilica para fijación de geotextil en piscinas. Con fungicida, antibacterias y sin disolventes.



5027	Bucket 6 Kg	2 (12Kg)/box	8414646530302
------	-------------	--------------	---------------

## Universal Cleaner Décapant Universel Limpiador Universal

Cleans and degreases plastic and metal materials (PVC, CPVC, ABS, copper, steel, galvanized steel etc).

Nettoie et dégraisse plastiques et métaux (PVC, CPVC, ABS, cuivre, acier, acier galvanisé, etc).

Limpia y desengrasa de forma facil diversos materiales plásticos y metálicos, como PVC, CPVC y ABS, cobre, acero, acero galvanizado, etc.



YouTube

152	Spray 400 ml	12/box	8414646015205
-----	--------------	--------	---------------



152

## PE cleaner Décapant PE Limpiador tuberías PE

Solvent cleaner for polyethylene (PE), polypropylene (PP), polybutene (PB) and Polyvinylidene fluoride (PVDF) pipes and fittings.

Décapant pour la préparation de l'union de tubes et raccords en polyéthylène (PE), polypropylène (PP), Polybutène (PB) et polyfluorure de vinyle (PVDF).

Disolvente limpiador para la realización de uniones soldadas de polietileno (PE), polipropileno (PP), polibuteno (PB) y polifloruro de vinilo (PVDF).

128	Metal can 500 ml	6/box	8414646012808
-----	------------------	-------	---------------



128

## PVC cleaner Décapant PVC Limpiador PVC

Solvent cleaner for PVC pipes and fittings.

Décapant pour nettoyer tubes et raccords en PVC.

Limpiador para tuberías y accesorios de PVC.



YouTube

205	Metal can 1 L	12*/box	8414646020506
206	Metal can 500 ml	12*/box	8414646020605
207	Plastic bottle 250 ml	35*/box	8414646020704
215	Plastic bottle 500 ml	24*/box	8414646021503
133	Plastic bottle 1 L	20*/box	8414646013300

\* In shrink-wrapped tray

207



215



133



206



205

8205



8220

## O-ring lubricant Lubrifiant pour joints élastomères Lubricante Juntas Elásticas

For assembling pipes, sleeves and fittings with o-ring connections. Suitable for use on PVC, concrete, asbestos and steel pipes.

Pour l'assemblage de tuyaux, manchons et raccords à joints en caoutchouc. Apte pour PVC, béton, amiante et acier.

Certificado agua potable. Lubricante especial para juntas elásticas en tuberías de PVC, hormigón, fibrocemento y acero.



YouTube



8204

8207

\* In shrink-wrapped tray

8204	Tube 1 L	12*/box	8414646820403
8205	Bucket 5 L	2 (10L)/box	8414646820502
8207	Bucket 2,5 L	4*/box	8414646820755
8220	Tube 150 ml	24/box	8414646822001

## Cable installation lubricant Gel passe-câbles Gel Pasacables

For installing unipolar and multipolar electric cables, telephone and fibre optic cables. Protects cables from ageing. Water-based. Odourless, non-drip, nonflammable and biodegradable.

Lubrifiant pour l'installation de câbles électriques unipolaires et multipolaires, câbles de téléphonie et fibre optique. Protège le câble du vieillissement. Produit à base d'eau. Inodore, ne coule pas, non inflammable et biodégradable.

Lubricante para la instalación de cables eléctricos, tanto unipolares como multipolares, cables de telefonía y fibra óptica. Protege el cable del envejecimiento. Base acuosa. Inodoro, no gotea, no inflamable y biodegradable.



8214

8214	Bottle 1L	12/box	8414646821400
------	-----------	--------	---------------

## Radiator noise silencer Éliminateur de bruit radiateurs Eliminador de Ruidos

Protects the internal wall of the radiator from water, preventing corrosion and the formation of gases. Eliminates external factors that alter the neutral pH of the water. Improves energy efficiency.

Imperméabilise la paroi interne du radiateur, la protégeant de la corrosion et empêchant la formation de gaz. Élimine les facteurs externes qui modifient le pH neutre de l'eau. Augmente l'efficacité énergétique.

Impermeabiliza las paredes internas del radiador, protegiéndolo de la corrosión y evitando la formación de gases. Elimina factores externos que alteran el PH neutro del agua. Potencia el rendimiento energético.



355

355	Jerry can 1 L	6/box	8414646035500
-----	---------------	-------	---------------

## Cement remover Nettoyant ciment Quitacmentos

Eliminates cement and other construction waste such as limescale and saltpeter patches, saline efflorescences, rust stains, etc. Can be used on all materials resistant to acids, such as granite, slate, stone, tiles, etc.

Enlève les salissures de fin de chantier, restes de ciments, tâches de chaux et de salpêtre, mortiers, efflorescences salines et tâches de rouille sur façades et sols. Recommandé pour les matériaux résistant aux acides, granit, ardoise, grès, joints de dalles, carrelage.

Elimina residuos de fin de obra, restos de cemento, manchas de cal y salitre, morteros adheridos, eflorescencias salinas y manchas de óxido en fachadas y pavimentos. Indicado para materiales resistentes a los ácidos, granito, pizarra, gres, juntas de baldosas, azulejos.



YouTube

332	Bottle 1 L	10/box	8414646033209
352	Jerry can 5 L	4/box	8414646035203



332

352

## Anti-mould agent Anti moisissures Stop Moho

Prevents mould by eliminating fungal strains. Eliminates and prevents black stains and growth of bacteria.

Prévient la moisissure et les taches noires en éliminant la souche du champignon. Très efficace contre la prolifération de bactéries.

Previene el moho, eliminando las cepas de hongos. Previene el crecimiento de bacterias. Elimina manchas Blacks.



YouTube

331	Spray 750 ml	10/box	8414646033100
-----	--------------	--------	---------------



331

## Professional limescale cleaner Détartrant professionnel Descalcificador Profesional

For professional use only. Eliminates incrusted limescale on any type of machinery, circuit or professional installation. Prevents corrosion and protects equipment.

Réservé aux professionnels. Élimine les dépôts de calcaire sur tout type de circuit, machines et installation professionnel. Préviene la corrosion et assure la protection de vos équipements.

Uso exclusivo profesional. Elimina la cal más incrustada en cualquier tipo de máquina, circuitos de calefacción e instalación profesional. Previene la corrosión y protege los equipos.

329	Jerry can 5 L	4/box	8414646032905
354	Bottle 1 L	10/box	8414646035401



329

354

## Bathroom descaler Détartrant pour broyeur Desincrustante para trituradores de WC

Removes the buildup and keeps surfaces free from limescale, ensuring optimal performance.

Il élimine les résidus et maintient le broyeur sanitaire sans calcaire, assurant un fonctionnement optimal et prolongeant sa durée de vie. Desincrusta los residuos y mantiene el triturador de inodoro libre de cal, asegurando un funcionamiento óptimo y alargando su vida útil.

C01540	DESINCRUSTANTE TRITURADORES WC, Garrafa 5 L	3/box	8414646037306
--------	---	-------	---------------



C01540

## Drain cleaner Nettoyant de canalisation Desatascador Tuberías Eliminador de Olores



C02220

Quickly and effectively eliminates blockage produced by organic matter (soap, hair, paper, grease, rags, food, etc.). Prevents the blockage, and eliminates bad odours. Does not contain sulphuric acid.

Élimine rapidement et efficacement les bouchons produits par des matières organiques (savon, cheveux, papier, graisse, chiffons, aliments, etc.). Évite l'obstruction et élimine les mauvaises odeurs. Ne contient pas d'acide sulfurique.

Elimina rápida y eficazmente atascos producidos por materia orgánica (jabón, cabello, papel, grasas, trapos, alimentos etc.). Previene la formación de atascos y elimina los malos olores. No contiene ácido sulfúrico.

C02220	Bottle 1 L	10/box	8414646035302
--------	------------	--------	---------------

## Concentrated Caustic Soda Pipe Unblocker Déboucheur à la soude ultra-concentré Desatascador Sosa Ultraconcentrado



C02430

NUEVO  
NOVO

Eliminates blockages and bad odours produced by organic materials, grease, soap and detergent. For use in metal or plastic pipes in sinks, showers, bathtubs, etc. Do not use on aluminium or zinc. Works even with stagnant water.

Élimine les bouchons et les mauvaises odeurs produites par les matières organiques telles que : graisse, savon et détergents. S'utilise dans les canalisations en métal ou en plastique des toilettes, éviers, douches, baignoires. Ne convient pas pour une utilisation sur l'aluminium ou le zinc. Efficace même en cas d'eaux stagnantes.

Elimina atascos y malos olores producidos por restos de materiales orgánicos, grasas, jabón y detergentes. Utilizar en tuberías de metal o plástico de lavabos, fregaderos, duchas, bañeras, etc. No apto para uso en aluminio o zinc. Eficaz incluso con agua estancada.

C02430	Bottle 500ml	12/box	8414646036903
--------	--------------	--------	---------------

## Professional pipe unblocker Déboucheur professionnel Desatascador Profesional



302

301

For professional use only. Rapidly eliminates impurities and residues in drains. 98% sulphuric acid.

Uniquement pour utilisation professionnelle. Élimine rapidement les impuretés et résidus dans les canalisations. Acide sulfurique à 98%.

Desatascador profesional líquido. Elimina rápidamente impurezas y residuos de las cañerías. Porcentaje de ácido sulfúrico 98%.

COMPLIES WITH REACH  
REQUIREMENTS. REGISTERED  
EXPOSURE LIMIT (FOR USE AS A  
PIPE UNBLOCKER)

CONFORME AU RÈGLEMENT  
REACH. UTILISATION COMME  
DÉBOUCHEUR ENREGISTRÉ



301	Bottle 500 ml (1 kilo)	12/box	8414646030109
302	Bottle 1 L (2 kilos)	6/box	8414646030208



# DRAIN CLEANERS



Professional pipe unblocker  
Déboucheur professionnel  
Desatascador Profesional

Concentrated Caustic Soda Pipe Unblocker  
Déboucheur à la soude ultra-concentré  
Desatascador Sosa Ultraconcentrado

Drain cleaner  
Nettoyant de canalisation  
Desatascador Tuberías



## Plumber's putty Pâte à joints Pasta densa para cáñamo

Ready-mixed, non setting putty for sealing metal and plastic threaded parts. For use with hemp.

Pâte à joints pour l'étanchéité aux filetages en métal et en plastique.

Utilisation avec filasse.

Masilla para uniones roscadas de metal y plástico. Para usar con cáñamo.



333	Tube 100 g	12/box	8414646033308
307	Pot 150 g	12/box	8414646030703
322	Pot 400 g	12/box	8414646032202



## Hemp Filasse Cáñamo

Hemp fibre for threaded joints.

Fibre de chanvre pour unions filetéés.

Fibra de cáñamo para uniones roscadas.



300	Dispenser 80 g	12/box	8414646030000
306	Bag 200 g	24/box	8414646030604



## Thread sealant PTFE liquide raccords métalliques Sellador roscas metálicas

Liquid PTFE for sealing threaded metal parts. Non-irritant. Suitable for use in potable water installations.

Résine d'étanchéité anaérobie pour raccords filetés métalliques. Non irritant. Certifié eau potable.

Sellador a base de PTFE liquido para accesorios metálicos roscados. Apto agua potable. No irritante.



8637	Squeezy bottle 50 ml	12/box	8414646863707
8641	Squeezy bottle 250 ml	6/box	8414646864100
8663	Squeezy bottle 75 ml	12/box	8414646866302



# Thread Sealants

Suitable for drinking water  
Certified for gas

You Tube



[www.unecol.com](http://www.unecol.com)

## Chemical welder Soudure chimique Soldadura Química



8642


Cold chemical welder for non-threaded metal pipes and accessories. Provides fast and clean welding.

Soudure chimique à froid pour raccords métalliques non filetés. Réalise une soudure rapide et propre.

Soldadura química en frío para tuberías y accesorios metálicos no roscados. Produce soldaduras rápidas y limpias.



YouTube



8642 Bottle with individual box 10 ml

24/box

8414646864292

## Stearine Stéarine Estearina



7009

Self-soldering alloy. For use on copper and zinc prior to soldering.

Alliage auto-soudant. Application sur plomb et zinc avant soudure.

Aleación para soldadura White. Para aplicar sobre plomo y zinc.

7009 Bar 200 g

10/box

8414646700903

## Soldering blanket Couverture pour soudure Manta para soldadura



7010

Protects nearby objects and working area. Resists peak temperatures of 1400°C. Flexible. Can be used on any surface. Asbestos-free.

Protège les objets et la zone de travail à proximité. Résiste aux températures maximales de 1400°C. Souple. Peut être utilisé sur n'importe quelle surface. Sans amiante.

Protege los materiales y zonas cercanas. Resiste temperaturas punta de 1.400°C. Flexible, adaptable a cualquier espacio. Libre de amianto.

7010 Soldering blanket 50 cm x 35 cm, BLACK

1/box

8414646701009

## Plumbing flux and wire wool Décapant cuivre Decapante para soldar y lana de acero

Plumbing flux suitable for use on most metal types.

Décapant pour soudure, convient pour la plupart de métaux.

Decapantes válidos para la mayoría de metales.



7004	Pot with brush 100 ml, LIQUID	12/box	8414646700408
7005	Pot with brush 140 g, PASTE	24/box	8414646700507
7007	Pot with brush 100 g, GEL	12/box	8414646700705



7005



## Wire wool Paille de fer Lana de acero

Abrasive pads and wire wool for cleaning and sanding copper pipes and fittings before welding.


Fibre abrasive et laine d'acier pour le nettoyage et le ponçage des tuyaux et raccords en cuivre avant le processus de soudage.

Fibra abrasiva y lana de acero para la limpieza y lijado de tuberías y empalmes de cobre antes del proceso de soldadura.

7019	Bag 6 pieces	12/box	8414646701900
7016	Pack 10 pieces, 12 cm x 5 cm	12/box	8414646701603

NUEVO  
NEW

7016



7019



## Gas leak detector Détecteur de fuites de gaz Detector de fugas



7957

Detects leakages of gas or compressed air quickly and securely.

Détecte les fuites de gaz ou d'air comprimé rapidement et en toute sécurité.

Detecta fugas de gas o aire comprimido de forma rápida y segura.



7957 Spray 400 ml

12/box 8414646795701

## Waterproof repair spray Réparateur impèrmeable Reparador impermeable



7944

Seals holes and cracks by forming a flexible film. Suitable for gutters, drainpipes, cracks, leaks, holes. Prevents leaks, rusting and damp. Treated surfaces can be painted.

Scelle les trous et les fissures en formant un film flexible. Convient aux gouttières, tuyaux de drainage, fissures, fuites, trous. Empêche les fuites, la rouille et l'humidité. Les surfaces traitées peuvent être peintes.

Sella agujeros y grietas mediante una película flexible. Apto para canalones, desagües, grietas, fugas, agujeros. Evita la filtración de agua y la aparición de óxido y humedades. Pintable.



YouTube



7944 Spray 500 ml

12/box 8414646794407

## 360° Marker paint Aérosol de traçage permanent 360° Marcador de obra 360°

Professional fluorescent paint for marking public works, facilities, etc. Concrete, asphalt, wood, brick, metal, soil, etc. Its special 360° dispensing valve makes it useable in any position. This product is quick-drying, permanent and resistant to damp and UV rays. It includes a safety cap.

Peinture fluorescente professionnelle pour le marquage de travaux publics, d'équipements, etc. Béton, asphalte, bois, brique, métal, terre, etc. Peut être utilisé dans toutes les positions grâce à sa valve de dosage spéciale 360°. Séchage rapide, permanent et résistant à l'humidité et aux rayons UV. Comprend un bouchon de sécurité.

Pintura profesional fluorescente para señalización de obras públicas, instalaciones, etc. Hormigón, asfalto, madera, ladrillo, metal, madera, tierra etc. Se puede utilizar en todas las posiciones gracias a su válvula dosificadora especial 360°. Producto de secado rápido, permanente y resistente a la humedad y rayos UV. Incluye tapón de seguridad.

7965	RED MARKER PAINT	12 U/C	8414646796500
7966	GREEN MARKER PAINT	12 U/C	8414646796609
7967	BLUE MARKER PAINT	12 U/C	8414646796708
7968	YELLOW MARKER PAINT	12 U/C	8414646796807



Seals holes  
and cracks  
creating a  
flexible film  
resistant to  
atmospheric  
agents



Vertical applications



High filling capacity

[unecol.com](http://unecol.com)



## Epoxy putty Mastic epoxy Masilla epoxi

Bi-component epoxy putty for rapid repair of all materials. Once dry, can be sanded, drilled and painted.

Mastic époxy bi-composant pour une réparation rapide de tous les matériaux. Une fois sec, peut être poncé, percé et peint.

Masilla de dos componentes para reparaciones rápidas en todo tipo de materiales. Una vez curado se puede limar, pintar y taladrar.



YouTube

8102	Blister 2 components 75 g	24/box	8414646810299
8109	Bag 500 g (2x250 g)	10/box	8414646810909
8121	Tube with euroslot 125 g	24/box	8414646812194
8120	Tube in blister 60 g	12/box	8414646812095



8120

8102



8121



8109

## Pipe repair bandage Bande anti-fuites Venda de reparación

Repairs leaks in metal (iron, aluminium, copper) and PVC pipes from Ø 3/8" to 1". Pressure resistant up to 10 bar.

Répare les fuites dans les tuyaux métalliques (fer, aluminium, cuivre) et PVC de Ø 3/8 "à 1". Résistant à la pression jusqu'à 10 bar.

Protege los materiales y zonas cercanas. Resiste temperaturas punta de 1.400°C. Flexible, adaptable a cualquier espacio. Libre de amianto.



YouTube

400	Individual box, 5 cm x 130 cm	12/box	8414646040009
-----	-------------------------------	--------	---------------



400



## Anti-slip spray Spray antidérapant Antideslizante

For treatment of slippery surfaces, such as staircases, ramps, showers and floors. Ideal for gyms and spas.

Pour le traitement des surfaces glissantes, comme les escaliers, les rampes, les douches et les sols. Idéal pour les gymnases et les spas.

Para el tratamiento de superficies como escaleras, rampas, platos de ducha, suelos en general. Ideal para gimnasios y spas.



YouTube

7900	Spray 200 ml	12/box	8414646790003
356	Jerry can 1L	10/box	8414646035609



356

7900

## White plumber's putty Mastic blanc de plomberie Masilla fontanería

For sealing lavatories, sinks, bathtubs, bidets, etc. Does not harden. Watertight.

Pour l'étanchéité de toilettes, lavabos, baignoires, bidets, etc. Ne durcit pas. Étanche.

Para inodoros, lavabos, bañeras, bidet. No endurece. Impermeable y elástica.



YouTube

8115	Pot 500 g	12/box	8414646811500
8116	Pot 1 Kg	12/box	8414646811609



8116

8115

## Enamel Restorer Réparateur d'émail Esmalte restaurador

For covering chips in bath tubs, sinks, electrical household appliances, etc.

Pour couvrir les éclats, rayures dans les baignoires, les éviers, les appareils électroménagers, etc.

Para desconchados en bañeras, lavabos, electrodomésticos, etc.



5160	Bottle with brush. Blister 20 ml	24/box	8414646516092
------	----------------------------------	--------	---------------


5160

## Aluminium tapes Rubans aluminium Cintas aluminio

For sealing air-conditioning ducts, fireplaces, insulating panels, etc.

Étanchéité de conduits de climatisation, cheminées, panneaux isolants, etc.

Para sellado de conductos de aire acondicionado, chimeneas, paneles aislantes, etc.



8499

8490



8439

8414

8403

8490	Roll 10 m x 50 mm. 30 micras	24/box	8414646849008
8499	Roll 50 m x 50 mm. 30 micras	24/box	8414646849909
8403	Roll 10 m x 50 mm. 50 micras	24/box	8414646840302
8439	Roll 50 m x 50 mm. 50 micras	24/box	8414646843907
8414	Roll 50 m x 75 mm. 30 micras	24/box	8414646841408

8432



8434

8432	Roll 10 m x 50 mm. 30 micras	24/box	8414646843204
8434	Roll 45 m x 50 mm. 30 micras	24/box	8414646843402

8482



8465

8465	Roll 10 m x 50 mm. 30 micras	24/box	8414646846502
8482	Roll 50 m x 50 mm. 50 micras	24/box	8414646848209

## Self-amalgamating tape Ruban auto vulcanisable Cinta autovulcanizable

Repairs leaks in polyethylene, metal, rigid and flexible PVC pipes, hoses, engine pipes, electric cable joints, etc.

Réparation de tuyaux en polyéthylène, métal, PVC rigide et flexible, durites de moteur, raccords de câbles électriques.

Repara tuberías de polietileno, metal, PVC rígido y flexible, manguitos de motores, empalmes de cables eléctricos, etc. Ideal para gimnasios y spas.



YouTube



8443	Roll 9 m x 19 mm	22/box	8414646844393
8444	Roll 2,5 m x 19 mm	24/box	8414646844492



8443

8444

## Self-Vulcanising Silicone Tape Ruban Silicone Autovulcanisant Cinta Autovulcanizable Silicona

Repairs and seals leaks in hoses, tubes, PE, metal or PVC pipes, general plumbing, motor hoses, vehicles, boats, etc. Can be used on splices and isolation of electrical cables in contact with water or humidity. Clean and easy to use. Does not tear. Resistant to abrasion and UV rays.

Réparation et colmatage de fuites des tuyaux, conduits, tubes en polyéthylène, métal, PVC rigide et flexible, plomberie, tuyaux de moteur, véhicules, bateaux, etc. Épaisseur et isolation de câbles électriques qui doivent être en contact avec l'eau ou l'humidité. Propre et facile à appliquer. Résiste à la déchirure, à l'abrasion et aux rayons UV.

Reparación y sellado de fugas en mangueras, Tubes, tuberías de polietileno, metal, PVC rígido y flexible, fontanería, manguitos de motores, vehículos, barcos, etc. Empalmes y aislamiento de cables eléctricos que deban tener contacto con agua o humedad. Limpio y de fácil aplicación. Resistente al desgarró, la abrasión y a los rayos UV.



YouTube

7705	Roll 3 m x 25 mm	12/box	8414646770593
------	------------------	--------	---------------



7705

## Pipe insulation tape Ruban isolant Cinta coquillas

Self-adhesive polyurethane foam tape for insulating and protecting pipes.

Ruban adhésif en polyuréthane pour l'isolation et la protection des tubes.

Cinta autoadhesiva de espuma de polietileno para aislamiento y protección de tuberías.

8435	Roll 15 m x 50 mm, BLACK	12/box	8414646843501
7703	Roll 15 m x 50 mm, WHITE	12/box	8414646770302



7703

8435

## Waterproof repair tape Ruban de réparation instantanée Cinta reparadora instant

Instantly repairs water leaks on any material in wet or dry conditions, and under water. Flexible. Resistant to salt water and extreme temperatures (-45°C + 90°C).

Répare instantanément toute fuite d'eau sur surfaces sèches, humides ou sous l'eau. Flexible. Résistant à l'eau salée et aux températures (-45°C + 90°C).

Repara al instante cualquier fuga de agua. Une, pega y sella sobre cualquier material. Aplicable en seco, húmedo e inmersión. Flexible. Resistente al agua salada y temperaturas (-45°C +90°C).




NUEVO  
NEW

7702



YouTube


7702



7702



7702



7702	Rolls 10 cm x 1,5 m (4 White/4 Black/4 Transp)	12/box	8414646770203
------	--	--------	---------------

## Self-Adhesive Waterproof Sealant Protege-joint Auto Adhésif Cinta Cubrejuntas

White PVC self-adhesive sealant for protecting and covering joints on damp surfaces such as bathrooms and kitchens. Waterproof. Fast and easy to apply. Resistant to mould.

Protection adhésive en PVC pour les joints en surfaces humides comme salles de bains et cuisines Imperméable, rapide et facile à appliquer, résiste à la moisissure.

Sellador autoadhesivo de PVC blanco para protección y recubrimiento de juntas entre superficies en zonas húmedas como pueden ser baños y cocinas. Impermeable. Rápido y fácil de aplicar. Resistente al moho.



7700



YouTube

7700	Roll 22 mm x 2,4 m in blister	24/box	8414646770098
------	-------------------------------	--------	---------------

## Anti-mould Sealing Tape Ruban d'étanchéité anti-moisissure Cinta Selladora Anti-moho

Self-adhesive waterproof tape. Flexible and transparent. Prevents black mould stains and water filtration.

Ruban auto-adhésif, imperméable, flexible et transparent. Afin d'éviter le noircissement dû aux moisissures, aux infiltrations d'eau et aux taches d'huile, etc.

Cinta autoadhesiva, impermeable, flexible y transparente. Evita el enBlackrecimiento por el moho, la filtración de agua y manchas de aceite etc.



NUEVO  
NEW



7708





YouTube

7708	Roll 5 m x 30 mm in box	12/box	8414646770807
------	-------------------------	--------	---------------

- ✔ Self-adhesive
- ✔ Resistant to salt water
- ✔ Extreme temperatures (-45°C + 90°C)

- ✔ Impermeable y autoadhesiva
- ✔ Resistente al agua salada
- ✔ Temperaturas extremas (-45°C + 90°C)

- ✔ Autocollant
- ✔ Résistant à l'eau salée
- ✔ Résistant aux températures (-45°C + 90°C)



White  
Blanc  
Blanca



Transparent  
Transparente



Black  
Noir  
Negra

Pipes, downspouts, air conditioners, tanks, awnings, decks, canoes, inflatables, etc.  
Tuberías, bajantes, aires acondicionados, depósitos, toldos, cubiertas, etc  
Tuyaux, les descentes pluviales, les réservoirs, les auvents, les ponts, les canots pneumatiques, etc



unecol.com

## PTFE tape Rubans PTFE Cintas PTFE

High quality. High density.

Haute qualité. Haute densité.

Alta calidad. Alta densidad.



8442

8442

8457

8438



YouTube

8438	Roll 12 m x 12 mm x 0,075mm. 0.28 g/cm <sup>3</sup>	250/box	8414646843808
8440	Roll 50 m x 19 mm x 0,1 mm. 0.40 g/cm <sup>3</sup>	25/box	8414646844003
8441	Roll 50 m x 25 mm x 0,1 mm. 0.52 g/cm <sup>3</sup>	25/box	8414646844102
8442	Roll 12 m x 12 mm x 0,075mm. 0.35 g/cm <sup>3</sup>	250/box	8414646844201
8456	Roll 12 m x 12 mm x 0,1 mm. 0.35 g/cm <sup>3</sup>	250/box	8414646845604
8457	Roll 50 m x 19 mm x 0,1 mm. 0.52 g/cm <sup>3</sup>	25/box	8414646845703
8477	Roll 12 m x 12 mm x 0,1 mm. 0.70g/cm <sup>3</sup>	250/box	8414646847707
8492	Roll 25 m x 25 mm x 0,2 mm. 0.40 g/cm <sup>3</sup>	25/box	8414646849206

## PVC tape Ruban PVC Cinta PVC

Protection of metal pipes above or underground. Insulation of electric cables.

Protège tuyauteries métalliques en extérieur et câbles électriques.

Protección de tuberías metálicas, aéreas o enterradas. Aislante para cables eléctricos.



8425

8425	Roll 33 m x 50 mm	12/box	8414646842504
------	-------------------	--------	---------------

## SuperTite, Retail Market Products for painting, decorating, handicrafts and home



**Certified for  
drinking water**  
**Certifié eau  
potable**  
**Certificadas para  
agua potable**

**unecol**   
adhesive ideas



N° 1609550

## Packing tape Ruban Adhésif d'emballage Precinto embalaje

Packing tape for box closure. Strong. Does not break.

Ruban adhésif pour fermer les cartons d'emballages. Haute résistance à la rupture.


Precintado de cierres y cajas. Alta resistencia a la rotura.



8459	Roll 132 m x 50 mm, BROWN	36/box	8414646845901
8460	Roll 132 m x 50 mm, TRANSPARENT	36/box	8414646846007
8463	Roll 66 m x 50 mm, BROWN	36/box	8414646846304
8464	Roll 66 m x 50 mm, TRANSPARENT	36/box	8414646846403



8459  
8463



8460  
8464

## Signal tape Ruban signalisation Cinta señalización

For delimiting open spaces both indoors and outdoors.

Pour délimiter des grandes zones en intérieur et extérieur.

Para delimitar grandes espacios tanto en interior como exterior.



8448	Roll 200 m x 70 mm	12/box	8414646844805
------	--------------------	--------	---------------




8448

## Electrical PVC tape Ruban adhésif PVC Cinta aislante

For protecting joints in electrical wires and cables.

Pour isoler les raccordements de fils et les câbles électriques.

Ideal para aislar empalmes de hilos y cables eléctricos.



8437	Roll 20 m x 19 mm	48/box	8414646843709
8466	Roll 15 m x 19 mm	24/box	8414646846601



8466



8437



## Anti-slip tape Ruban antidérapage Cinta antideslizante

For indoor and outdoor use. High adhesive strength.

Utilisation intérieur et extérieur. Adhérence élevée.

Válida para interior y exterior. Alta adhesividad.



7707



NUEVO  
NEW

8401	Roll 10 m x 50 mm, BLACK	12/box	8414646840104
7704	Roll 10m x 50mm, TRANSPARENT	12/box	8414646770401
7706	Roll 5m x 25mm, LUMINESCENT	12/box	8414646770609
7707	Roll 5m x 50mm, YELLOW-BLACK	12/box	8414646770708



7706

## Double-sided tape Ruban adhésif double face Cinta doble cara

Double-sided tape.

Ruban double face.

Cinta doble cara.



8426	Roll 5 m x 19 mm individual box	12/box	8414646842696
------	---------------------------------	--------	---------------



8426

## Duct tape Ruban Adhésif "americain" Cinta americana

Can be used for packaging, tying, sealing, fixing and reinforcing. Available in grey or white.

Peut être utilisé pour emballer, attacher, fixer et renforcer. Disponible en gris ou en blanc.

Para embalar, atar, aislar, fijar y reforzar. Disponible en gris o blanco.



8407	Roll 10 m x 50 mm	24/box	8414646840708
8412	Roll 25 m x 50 mm	12/box	8414646841200

8412



8407



Display stand  
Display  
Expositor



8950



8950 Display stand 1 m x 2 m x 0.5 m



## Sanitary silicone Silicone sanitaire Silicona sanitarios

For sealing glass shower partitions, tiles, bath tubs, etc. Ideal for use with sanitary ware. High quality.

Permet d'étanchéifier les parois de douche, carrelages, baignoires etc... Idéale pour les sanitaires. Qualité supérieure.

Sellado de mamparas, azulejos y bañeras. Ideal para sanitarios. Alta calidad.



8501	Cartridge 300 ml, WHITE	24/box	8414646850103
8502	Cartridge 300 ml, TRANSLUCENT	24/box	8414646850202

6100	Tube 85 ml with euroslot, WHITE	12/box	8414646610004
6105	Tube 85 ml with euroslot, TRANSLUCENT	12/box	8414646610509



6105



6100

## Neutral silicone Silicone neutre Silicona neutra

For sealing mirrors, marble, granite, glass, metals, etc. Does not damage the finish on delicate materials.

Permet d'étanchéifier marbre, granite, miroir, verre, métaux, etc...N'abime pas le laquage des matériaux délicats.

Sellado de espejos, mármol, granito, vidrio, metales, etc. No daña el lacado de materiales delicados.



8526	Cartridge 300 ml, WHITE	24/box	8414646852602
8527	Cartridge 300 ml, TRANSLUCENT	24/box	8414646852701



## Multipurpose silicone Silicone multi-usages Silicona multiusos

For sealing panes, windows, bath tubs, sinks, etc.  
Ideal for DIY.

Permet d'étanchéifier les vitres et fenêtres, baig-  
noires, lavabos, etc... Idéale pour le bricolage.

Sellado de cristales, ventanas, bañeras, lavabos,  
etc.. Ideal para bricolaje.



8585	Cartridge 280 ml, WHITE	24/box	8414646858505
8586	Cartridge 280 ml, TRANSLUCENT	24/box	8414646858604

8585



8586

## Silicone in blister Silicone sous blister Silicona extra

For sealing panes, windows, bath tubs, sinks, etc.  
Ideal for DIY.

Permet d'étanchéifier les vitres et fenêtres, baig-  
noires, lavabos, etc... Idéale pour le bricolage.

Sellado de cristales, ventanas, bañeras, lavabos,  
etc.. Ideal para bricolaje.



6111	Blister, 50 ml tube, WHITE	24/box	8414646611193
6112	Blister, 50 ml tube, TRANSLUCENT	24/box	8414646611292



6111



6112

## MS polymer sealant, multipurpose MS joint et colle multi-usages MS Pega Sella

High quality adhesive and sealant with SMP technology. Resistant to extreme weather conditions. Fast, elastic.


Adhésif et scellant de haute qualité avec technologie SMP. Applicable sur les surfaces humides. Grande résistance aux intempéries. Rapide. Élastique.

Adhesivo y Sellador de alta calidad con tecnología SMP. Aplicable sobre cualquier superficie. Resistente a condiciones extremas. Rápido y elástico.



8505

8506



8505	Cartridge 280 ml	12/box	8414646852008
8506	Cartridge 280 ml	12/box	8414646852107

## Pools MS Sealant Piscines MS Mastic Especial Piscinas

New generation MS elastic polymer sealant that cures by moisture, making it especially suitable for swimming pools. Sealing and/or elastic gluing in swimming pools made of polyester. Bonding of stoneware, tiles, decorative elements, skimmers and cracks. These applications can be made in immersion, useful for sealing joints and joints.

Il s'agit d'un mastic polymère élastique MS de nouvelle génération qui durcit par l'humidité, il est donc particulièrement adapté pour les piscines. Étanchéité et/ou collage élastique dans les piscines en polyester. Collage de carreaux, carrelages, éléments décoratifs, skimmers et fissures. Ces collages peuvent s'appliquer en immersion, utile pour sceller les joints.

Es un sellador elástico de polímero de nueva generación MS que cura por humedad por lo que resulta especialmente adecuado para piscinas. Sellado y/o pegado elástico en piscinas de obra, de poliéster y portátiles. Pegado de gresites, azulejos, elementos decorativos, skimmers y fisuras. Estos pegados se pueden realizar en inmersión, útil para sellados de juntas y uniones.



8524



8524	Pools MS Sealant. Tube 150g	12/box	8414646852404
------	-----------------------------	--------	---------------

## Polyurethane putty Mastic polyuréthane Masilla de poliuretano monocomponente

For indoor and outdoor use. High adhesive strength.

Utilisation intérieur et extérieur. Adhérence élevée.

Válida para interior y exterior. Alta adhesividad.



YouTube

7801	Cartridge 300 ml, WHITE	12/box	8414646780103
7802	Cartridge 300 ml, GREY	12/box	8414646780202

7801



7802

## Polyurethane foam Mousse de polyuréthane Espuma de poliuretano

For thermal, acoustic or electrical insulation.

Pour l'isolation thermique, acoustique et électrique.

Aislamiento térmico, acústico o eléctrico.



YouTube

8701	Spray 750 ml	12/box	8414646870101
8702	Gun Spray 750 ml	12/box	8414646870200

8701



8702

## Polyurethane Foam Cleaner Nettoyant de Mousse Polyuréthane Limpiador de Espuma de Poliuretano

For thermal, acoustic or electrical insulation.

Pour l'isolation thermique, acoustique et électrique.

Aislamiento térmico, acústico o eléctrico.



YouTube

8704	Cleaner, Spray 500 ml	12/box	8414646870408
8705	Caulking gun cleaner	1/box	8414646870507

8704



8705

## Assembly putty Mastic de montage Stop clavos

8313



8311



For professional and DIY purposes. Solvent-free. Suitable for use on all types of materials.

À des fins professionnelles et de bricolage. Sans solvants. Convient pour une utilisation sur tous types de matériaux.

Uso profesional y bricolaje. Sin disolventes. Une y repara todo tipo de materiales.



8311	Tube 150 g	12/box	8414646831195
8313	Cartridge 310 ml	12/box	8414646831300

## Refractory sealant Mastic réfractaire Masilla refractaria

Resistant to fire. Temperature resistant up to 1250°C. Seals, repairs and covers cracks in refractory materials, such as fireplaces and chimneys.

Résistant au feu. Résiste aux températures jusqu'à 1250°C. Joint, répare et recouvre les fissures de matériaux réfractaires tels que les cheminées.

Sellador resistente al fuego (hasta 1250°). Sella, repara y tapa fisuras en materiales refractarios, así como estufas y chimeneas.



8394



8394	Cartridge 310 ml	12/box	8414646839405
------	------------------	--------	---------------

## Caulking guns Pistolet silicone Pistolas silicona

7607	Caulking gun with teeth	24/box	8414646760709
7614	Reinforced caulking gun	12/box	8414646761409

7607



7614





# Quality

## QUALITÉ. CALIDAD

All our production, logistical and organization processes are focused on ensuring quality, continuous improvement and customer satisfaction. Our Multisite Integrated quality and environment management system is certified by SGS, in line with the requirements of the International Standards ISO 9001 and ISO 14001. Unecol considers R&D and innovation to be a basic pillar of evolution, and was the first company in our sector in the Valencian Autonomous Region to obtain the ISO 9001 (1991) certificate. We are also pioneers in environmental management. We were the first company in Spain to manufacture THF-free products (2012), the first company to obtain AENOR certification for PVC cement made in Spain (2014). Our products also have the most prestigious European certificates, such as CSTB, BSI, KOMO, KIWA, etc.

Tous nos processus de production, de logistique et d'organisation sont axés sur la qualité, l'amélioration et la satisfaction client. Notre système de gestion de la qualité et de l'environnement est certifié par SGS, conformément aux exigences des normes internationales ISO 9001 et ISO 14001. Unecol considère la R&D et l'innovation comme un pilier de l'évolution et a été la première entreprise de notre secteur et de la Communauté Valencienne à obtenir le certificat ISO 9001 (1991). Nous sommes également des pionniers de la gestion environnementale. Nous avons été la première entreprise en Espagne à fabriquer des produits sans THF (2012), la première entreprise à obtenir la certification AENOR pour la colle PVC fabriquée en Espagne (2014). Nos produits disposent également des certificats européens les plus prestigieux, tels que CSTB, BSI, KOMO,

Todos nuestros procesos productivos, logísticos y organizativos están enfocados al aseguramiento de la calidad, de la mejora continua y a la satisfacción de los clientes. Por ello, nuestro Sistema de Gestión Integrado de Calidad y Medio Ambiente multisite está certificado por SGS, en línea con lo requerido por las Normas Internacionales ISO 9001 e ISO 14001. Unecol considera el I+D+i un pilar básico de su evolución. Lo llevamos en nuestro ADN, lo que nos llevó a ser la primera empresa del sector en la Comunidad Valenciana en conseguir la certificación ISO 9001 (1991), además de ser pioneros en la gestión medioambiental. Hemos sido la primera empresa en fabricar adhesivos sin THF en España (2012), la primera empresa en obtener la certificación AENOR para un adhesivo de PVC fabricado en España (2014) y además poseedora de los más prestigiosos certificados europeos (WRAS, CSTB, BSI, KOMO, Q.B. etc).



## Professional contact adhesive Colle néoprène professionnelle Adhesivo de contacto profesional



3218

High strength and resistance. Toluene free. Resistant to high temperatures.

Haute résistance. Sans toluène. Résiste aux températures élevées.

Rápido y resistente. Sin tolueno. Resiste altas temperaturas.



YouTube

3218	Metal Can 5 L	4/box	8414646321801
------	---------------	-------	---------------

## Multi-purpose contact adhesive Colle néoprène multi-usages Adhesivo de contacto multiusos



3219

High strength and resistance. Toluene free.

Haute résistance. Sans toluène.

Rápido y resistente. Sin tolueno.



YouTube

3219	Tube 1 L	12*/box	8414646321900
3220	Tube 500 ml	12*/box	8414646322006
3221	Tube 250 ml	24*/box	8414646322105
3222	Tube 125 ml with individual box and display box	48/box	8414646322297
3225	Pot with brush 500 ml	12*/box	8414646322501
3410	Blister con Tube 60 ml	24/box	8414646341090

\* In shrink-wrapped tray



3220



3221



3222



3225



3410

\* En retráctil

## Repositionable contact adhesive in spray Colle néoprène spray repositionnable Contacto spray reposable

For use with paper, cardboard, fibre glass. Widely used in graphic arts and model aeroplanes.

Pour papier, carton, fibre de verre. Très utilisée pour l'art plastique et l'aéromodélisme.

Para papel, cartón, fibra de vidrio. Imprescindible en artes gráficas y aeromodelismo.

3207	Aerosol 400 ml	12/box	8414646320705
------	----------------	--------	---------------



3207

## Fast-drying white glue, transparent finish Colle à bois rapide transparente au séchage Cola blanca rápida transparente

Anti drip nozzle. Creates a clean, strong finish.

Bouchon anti-goutte. Finition propre et résistante.

Tapón antigoteo. Acabados resistentes y limpios.



5191

5147	Blister, bottle 50 g	12/box	8414646514791
5181	Bottle 125 g	12/box	8414646518102
5191	Bottle 250 g	12/box	8414646519109



5181



5147

## Wood glue Colle à bois Cola blanca para madera

For bonding wood, tablex or similar materials, textile, cardboard, cork panels, paper, etc.

Pour le collage de bois, Tablex ou similaires, tissus, cartons, papier, etc.

Para pegado de madera, tablex o similares, tejidos, cartón, corcho, papel, etc.



5112	Tube 1000 g	12*/box	8414646511202
5113	Bottle with cannula 500 g	12/box	8414646511301
5128	Bottle with cannula 125 g	12/box	8414646512803
5129	Bottle with cannula 250 g	12/box	8414646512902
5152	Bottle with cannula 750 g	12/box	8414646515200

\* In shrink-wrapped tray

5128



5129



5113



5152



5112



5004

## Extra strong, fast white glue Colle à bois extra forte et rapide Cola White rápida resistente

Vinyl based adhesive, with fast initial grab.  
Used for sheeting, plyboard, coverings, etc.

Colle vinylique à prise rapide.  
Utilisée pour le revêtement, le contreplaqué, etc.

Cola vinílica de rápido fraguado y elevada  
resistencia final. Para chapeado, mechoneado,  
montado, macizado, armazones, etc.



5002	Jerry can 6 Kg	1 (6Kg)/box	8414646500206
5004	Jerry can 30 Kg	1 (30Kg)/box	8414646500404



1007

## Wallpaper paste Colle pour papier peint Cola para papel pintado

Cellulosic based paste in flakes for hanging wall  
paper. Fast preparation, without lumps.

Colle cellulosique en poudre pour poser du  
papier peint. Préparation rapide sans formation de grumeaux.

Celulósico para la colocación de papel pintado  
Preparación rápida sin formación de grumos.



1007	Box 125 g	12*/box	8414646100703
------	-----------	---------	---------------

\* In shrink-wrapped



4014

## Expanded polystyrene adhesive Colle pour polystyrène expansé Adhesivo corcho blanco

Used for fixing plaques, skirting boards and insulation materials made of  
expanded polystyrene. Gel consistency.

Utilisée pour la fixation de plaques, plinthes et isolants en polystyrène  
expansé. Consistance gel.

Pegado de placas y zócalos de poliestireno y aislantes de poliestireno  
expandido. Consistencia en gel.



4014	Can, 1 L	12/box	8414646401404
------	----------	--------	---------------

\* En retráctil

## Hard plastic adhesive Colle plastiques rigides Adhesivo plásticos rígidos

For bonding toys, polyester, model aeroplanes, etc

Pour coller les jouets, le polyester, modélisme etc...

Para pegar juguetes, poliéster, modelismo, etc



2209	Plastic tube 60 ml	24/box	8414646220999
------	--------------------	--------	---------------



2209

## Instant glue Colle instantanée Adhesivo instantáneo

Cyanoacrylate. Multipurpose

Cyanoacrylate. Applications multiples

Cianoacrilato. Múltiples aplicaciones



6208	Blister, 3 tubes 1 g	12/box	8414646620898
6236	Blister, tube 3 g	24/box	8414646623691
6262	Blister, bottle with brush 8 g	12/box	8414646626296



6262



6208



6236





# Industrial cyanoacrylates

## Tech specs

### GENERAL USE

- Suitable for **general use**.
- Bonds in low humidity conditions.
- Suitable for passive surfaces that normally make curing difficult.
- Medium viscosity.

VISCOSITY at 23 °C	80-140 mPa s
--------------------	--------------

FILL CAPACITY	0.07 mm
TEMPERATURE RANGE	-54 to +82°C

DRYING TIME	Wood	< 5 s
	Nitrile	< 5 s
	Neoprene	< 5 s
	EPDM	< 15 s
	Steel	20-40 s
	Polycarbonate	10-40 s

### DIFFICULT PLASTICS

- Suitable for **difficult-to-bond** surfaces such as rubber and plastic.
- Adapted for low humidity conditions.
- Also suitable for bonding thermoplastics when used with primer p.70 (Ref 7140, 5L Can), which prepares difficult surfaces such as polyethylene, polypropylene and PTFE.
- Low viscosity.

VISCOSITY at 23 °C	25-35 mPa s
--------------------	-------------

FILL CAPACITY	0.05 mm
TEMPERATURE RANGE	-54 to +82°C

DRYING TIME	Wood	< 5 s
	Nitrile	< 5 s
	Neoprene	< 5 s
	EPDM	< 10 s
	Steel	20-40 s
	Polycarbonate	10-40 s

### EXTRA FAST

- Suitable for synthetic materials and rubber.
- Extremely fast bonding.
- Very fluid and permeating, which makes it suitable for gluing tight fitting pieces
- Glues very quickly without allowing time for any adjustment.
- Very low viscosity.

VISCOSITY at 23 °C	5-10 mPa s
--------------------	------------

FILL CAPACITY	0.03 mm
TEMPERATURE RANGE	-54 to +82°C

DRYING TIME	Wood	< 5 s
	Nitrile	< 5 s
	Neoprene	< 5 s
	EPDM	< 10 s
	Steel	20-40 s
	Polycarbonate	10-30 s

### POROUS MATERIALS

### ROUGH SURFACES

- Suitable for bonding metal-metal, metal-rubber and metal-plastic
- Good filling capacity, suitable for gluing rough surfaces and porous materials.
- Allows time for the readjustment of pieces during assembly.
- High viscosity.

VISCOSITY at 23 °C	1500 mPa s
--------------------	------------

FILL CAPACITY	0.30 mm
TEMPERATURE RANGE	-30 to +70°C

DRYING TIME	Wood	< 5 s
	Nitrile	< 10 s
	Neoprene	-----
	EPDM	< 25 s
	Steel	50-70 s
	Polycarbonate	-----

### FLEXIBLE BONDS

- Suitable for a wide range of metals, plastics and rubbers.
- It creates a flexible bond, very resistant to vibrations and impacts.
- Black color.
- Average curing time.
- Medium viscosity.

VISCOSITY at 23 °C	350-450 mPa s
--------------------	---------------

FILL CAPACITY	0.12 mm
TEMPERATURE RANGE	-54 to +82°C

DRYING TIME	Wood	10-30 s
	Nitrile	< 15 s
	Neoprene	< 15 s
	EPDM	< 25 s
	Steel	10-30 s
	Polycarbonate	20-50 s



# Cyanoacrylates industriels

## Spécifications techniques

### USAGE GÉNÉRAL

-

- Préconisé pour un usage général
- Collage dans des conditions de base humidité
- Approprié pour les superficies passives dont le séchage est difficile
- Viscosité moyenne

VISCOSITÉ à 23 °C	80-140 mPa s
-------------------	--------------

CAPACITÉ DE REMPLISSAGE	0.07 mm
RANG DE TEMPÉRATURE	-54 to +82°C

TEMPS DE SÉCHAGE	Bois	< 5 s
	Nitrile	< 5 s
	Néoprène	< 5 s
	EPDM	< 15 s
	Acier	20-40 s
	Polycarbonate	10-40 s

### PLASTIQUES DIFFICILES

-

- Préconisé pour le collage de superficies difficiles comme caoutchouc et plastiques
- Adapté aux conditions de faible humidité
- La colle convient également pour coller le thermoplastique si elle est utilisée avec le primer P70 (Ref 7140, pot 5L), qui prépare les superficies difficiles telles que le polyéthylène, le polypropylène et le PTFE.
- Viscosité faible

VISCOSITÉ à 23 °C	25-35 mPa s
-------------------	-------------

CAPACITÉ DE REMPLISSAGE	0.05 mm
RANG DE TEMPÉRATURE	-54 to +82°C

TEMPS DE SÉCHAGE	Bois	< 5 s
	Nitrile	< 5 s
	Néoprène	< 5 s
	EPDM	< 10 s
	Acier	20-40 s
	Polycarbonate	10-40 s

### EXTRA-RAPIDE

-

- Convient pour les matériaux synthétiques et caoutchoucs
- Très fluide et pénétrant facilitant ainsi son application sur des pièces très serrées
- Colle extrêmement vite. Ne permet pas de réajustement.
- Très faible viscosité

VISCOSITÉ à 23 °C	5-10 mPa s
-------------------	------------

CAPACITÉ DE REMPLISSAGE	0.03 mm
RANG DE TEMPÉRATURE	-54 to +82°C

TEMPS DE SÉCHAGE	Bois	< 5 s
	Nitrile	< 5 s
	Néoprène	< 5 s
	EPDM	< 10 s
	Acier	20-40 s
	Polycarbonate	10-30 s

### MATÉRIAUX POREUX-

### SUPERFICIES RUGUEUSES

-

- Préconisé pour coller métal-métal, métal-caoutchouc, métal-plastique.
- Bonne capacité de remplissage, convient pour coller superficies rugueuses et poreuses.
- Permet le repositionnement des pièces pendant l'assemblage.
- Haute viscosité

VISCOSITÉ à 23 °C	1500 mPa s
-------------------	------------

CAPACITÉ DE REMPLISSAGE	0.30 mm
RANG DE TEMPÉRATURE	-30 to +70°C

TEMPS DE SÉCHAGE	Bois	< 5 s
	Nitrile	< 10 s
	Néoprène	-----
	EPDM	< 25 s
	Acier	50-70 s
	Polycarbonate	-----

### COLLAGES FLEXIBLES

-

- Convient à une large gamme de métaux, plastiques et caoutchoucs.
- Union flexible, très résistante aux vibrations et chocs
- Couleur noire.
- Temps de séchage moyen.
- Viscosité moyenne

VISCOSITÉ à 23 °C	350-450 mPa s
-------------------	---------------

CAPACITÉ DE REMPLISSAGE	0.12 mm
RANG DE TEMPÉRATURE	-54 to +82°C

TEMPS DE SÉCHAGE	Bois	10-30 s
	Nitrile	< 15 s
	Néoprène	< 15 s
	EPDM	< 25 s
	Acier	10-30 s
	Polycarbonate	20-50 s

# Cianoacrilatos industriales

## Especificaciones técnicas

### USO GENERAL

- Adhesivo de media viscosidad que proporciona uniones extremadamente resistentes.
- Rápida polimerización en contacto con gran variedad de materiales, produciendo unas uniones de alta resistencia a la tracción en muy cortos espacios de tiempo.
- Unión de gran diversidad de materiales, como metales, porcelana, mármol, plásticos, goma, vidrio, caucho, madera, etc. entre sí o combinados.

Viscosidad a 23°C 80-140 mPa s

CAPACIDAD DE RELLENO 0.07 mm  
RANGO DE TEMPERATURA -54 a +82°C

TIEMPO DE SECADO	Madera de balsa	< 5 s
	Nitrilo	< 5 s
	Neopreno	< 5 s
	EVA	< 5 s
	EPDM	< 15 s
	Acero	20-40 s
	PVC	5-10 s
Policarbonato	10-40 s	

### PLÁSTICOS DIFÍCILES

- Adhesivo de media baja viscosidad que proporciona uniones extremadamente resistentes.
- Rápida polimerización en contacto con gran variedad de materiales, produciendo unas uniones de alta resistencia a la tracción en muy cortos espacios de tiempo.
- Empleo uniones de sustratos difíciles especialmente materiales elastoméricos.
- Válido para termoplásticos si se usa con Primer P70 (ref. 7140, lata 5L), que prepara las superficies de materiales difíciles como el polietileno, polipropileno y PTFE.

Viscosidad a 25°C 25-35 mPa s

CAPACIDAD DE RELLENO 0.05 mm  
RANGO DE TEMPERATURA -54 a +82°C

TIEMPO DE SECADO	Madera de balsa	< 5 s
	Nitrilo	< 5 s
	Neopreno	< 5 s
	EVA	< 5 s
	EPDM	< 10 s
	Acero	20-40 s
	PVC	3-10 s
Policarbonato	10-40 s	

### EXTRA-RÁPIDO

- Adhesivo de muy baja viscosidad que proporciona uniones extremadamente resistentes, aconsejado para superficies poco porosas.
- Pegado extremadamente rápido, que no permite ajustes posteriores.
- Muy fluido y penetrante, especialmente adecuado para pegar piezas bien ajustadas y sin holguras.
- Rápida polimerización en contacto con gran variedad de materiales, produciendo unas uniones de alta resistencia a la tracción en muy cortos espacios de tiempo.

Viscosidad a 23 °C 5-10 mPa s

CAPACIDAD DE RELLENO 0.03 mm  
RANGO DE TEMPERATURA -54 a +82°C

TIEMPO DE SECADO	Madera de balsa	< 5 s
	Nitrilo	< 5 s
	Neopreno	< 5 s
	EPDM	< 10 s
	Acero	20-40 s
	PVC	5-10 s
	Policarbonato	10-30 s

### MATERIALES POROSOS

### SUPERFICIES RUGOSAS

- Adhesivo de alta viscosidad que proporciona uniones extremadamente resistentes.
- Buena capacidad de relleno, lo que lo hace adecuado para pegar superficies rugosas y materiales porosos especialmente madera.
- Permite reajustar las piezas durante el montaje.
- Rápida polimerización en contacto con gran variedad de materiales, produciendo unas uniones de alta resistencia a la tracción en muy cortos espacios de tiempo.

Viscosidad a 23 °C Aprox. 1500 mPa s

CAPACIDAD DE RELLENO 0.30 mm  
RANGO DE TEMPERATURA -30 a +70°C

TIEMPO DE SECADO	Madera de balsa	< 5 s
	Roble	120-180 s
	Nitrilo	< 10 s
	EVA	< 7 s
	EPDM	< 25 s
	Acero	50-70 s

### UNIONES FLEXIBLES

- Adhesivo de viscosidad media que proporciona uniones extremadamente resistentes.
- Indicado para una amplia gama de metales, plásticos y cauchos
- Unión flexible y con gran resistencia al pelado, las vibraciones y los golpes
- Tiempo de curado medio.
- Rápida polimerización en contacto con gran variedad de materiales, produciendo unas uniones de alta resistencia a la tracción en muy cortos espacios de tiempo.

Viscosidad a 23 °C 350-450 mPa s

CAPACIDAD DE RELLENO 0.12 mm  
RANGO DE TEMPERATURA -54 a +82°C

TIEMPO DE SECADO	Balsa	10-30 s
	Nitrilo	< 15 s
	Neopreno	< 15 s
	EPDM	< 20 s
	Acero	10-30 s
	Policarbonato	20-50 s

## Cyanoacrylate Cyanoacrylate Cianoacrilato

Cyanoacrylate adhesive for diverse applications and materials. Variety of viscosities.

Colle cyanoacrylate pour divers utilisations et matériaux. Variété de viscosités.

Adhesivos para diversos usos y materiales. Gran variedad de viscosidades.

7117	Cyanoacrylate, extra fast, bottle 50 gr	12/box	8414646711701
7120	Cyanoacrylate, general purpose, bottle 50 gr	12/box	8414646712005
7121	Cyanoacrylate, porous materials, bottle 20 gr	12/box	8414646712104
7122	Cyanoacrylate, porous materials, bottle 50 gr	12/box	8414646712203
7131	Cyanoacrylate, extra fast, bottle 20 gr	12/box	8414646713101
7134	Cyanoacrylate, general purpose, bottle 20 gr	12/box	8414646713408
7153	Cyanoacrylate, plastics, bottle 50 gr	12/box	8414646715303
7154	Cyanoacrylate, flexible, bottle 20 gr**	12/box	8414646715402
7159	Cyanoacrylate, plastics, bottle 20 gr	12/box	8414646715907
7264	Cyanoacrylate, flexible, bottle 50 gr**		

\*Check availability



## Mitre kit Kit accélérateur cyanoacrylate Kit acelerante y cianoacrilato

For bonding porous materials & vertical bonds. Bonds immediately.

Pour coller des matériaux poreux et des liaisons verticales. Collage instantané.

Para uniones de materiales porosos y uniones verticales. Pegado instantáneo.



YouTube

7156	Bottle 50 gr+Aerosol 200 ml	6/box	8414646715600
7155	Aerosol 200 ml	12/box	8414646715501



7155


7156

## Super cyanoacrylate 1401 Super cyanoacrylate 1401 Super Precisión 1401

Specially formulated for technical and porous materials such as paper, cardboard, leather, fabric, elastomers, etc. Very fast. Does not absorb into parts.

Spécialement conçue pour les matériaux techniques et poreux tels que le papier, le carton, le cuir, le tissu, les élastomères, etc ... Très rapide. Ne pénètre pas.

de última generación especialmente diseñado para materiales técnicos y porosos como papel, cartón, cuero, tela, elastómeros, etc. Muy rápido. No cala en el material y tolera movimiento de la pieza.



YouTube

6971	Bottle 20g	12/box	8414646697104
------	------------	--------	---------------



6971



## Anaerobic adhesives Résines anaérobies Adhesivos anaeróbicos

Threaded joints. Hydraulic. High pressure. Medium resistance. Threaded joints. High tolerance. High resistance. Sealant for threads and accessories. Low resistance. Non-irritant.

Raccords filetés. Hydraulique pression élevée. Résistance moyenne. Raccord filetés grande tolérance. Résistance élevée. Étanchéité filetages et accessoires. Démontage facile. Non irritant.

Juntas roscadas. Hidráulico alta presión. Resistencia media. Juntas roscadas alta tolerancia. Resistencia alta. Sellador de roscas y accesorios. Resistencia baja. No irritante.



8628	Bottle 50 ml	12/box	8414646862809
8629	Bottle 50 ml	12/box	8414646862908
8645	Bottle 50 ml	12/box	8414646864506

Locking sealants. Screw lock. Low resistance. Nut lock. High resistance. Stud lock. High resistance. Non-irritant.

Fixation et étanchéité plate. Fixation roulements. Résistance moyenne. Fixation axes. Résistance élevée. Étanchéité/joint plats. Faible résistance. Non irritant.

Fijadores. Fijador de tornillos. Resistencia baja. Fijador de tuercas. Resistencia media. Fijador de espárragos. Resistencia alta. Fijador Penetrante. baja viscosidad. Resistencia media. No irritante.



8608	Bottle 50 ml	12/box	8414646860805
8612	Bottle 50 ml	12/box	8414646861208
8616	Bottle 50 ml	12/box	8414646861604

Locking sealants. Screw lock. Low resistance. Nut lock. High resistance. Stud lock. High resistance. Non-irritant.

Freinage de filetages de vis. Démontage facile. Écrou. Haute résistance. Goujon. Haute résistance. Non irritant.

Retenedores y juntas planas. Fijador de rodamientos. Resistencia media. Fijador de ejes. Resistencia alta. Sellador/formador juntas planas. Resistencia baja. No irritante.



8609	Bottle 50 ml	12/box	8414646860904
8614	Bottle 50 ml	12/box	8414646861406
8615	Bottle 50 ml	12/box	8414646861505



8629



8612



8614

# Anaerobic adhesives

## Tech specs

### THREADED JOINTS



**PERMANENT LOCK. THREADED FASTENERS**  
 · Suitable for sealing threaded, metal fasteners with large clearance spaces · Fast sealing · Allows high tolerances thanks to its high gap filling capacity · High strength · Medium viscosity · Very difficult to dismantle.

MANIPULATION TIME (minutes)	15-30
WORKING TIME (hours)	3-6
VISCOSITY (25°C) mPa · s	6.000-7.000
FILL CAPACITY (Max.) Mm	0,25

RESISTANCE TO TORSION (BREAKING) (N · m)	28-40
RESISTANCE TO TORSION (RESIDUAL) (N · m)	28-40
TEMPERATURE RANGE: °C	-53 +148

COLOR




**HIGH PRESSURE. HYDRAULIC FASTENERS**  
 · Suitable for sealing fine-pitch threaded fasteners in high pressure hydraulic or pneumatic systems · Supports up to 200 bar · Replaces PTFE tape for sealing water, gases, hydrocarbons, oils and other chemicals · Resistant to vibrations, heat and pressure · Low strength · Relatively difficult to dismantle.

MANIPULATION TIME (minutes)	15-30
WORKING TIME (hours)	1-3
VISCOSITY (25°C) mPa · s	400-800
FILL CAPACITY (Max.) Mm	0,15

RESISTANCE TO TORSION (BREAKING) (N · m)	12-15
RESISTANCE TO TORSION (RESIDUAL) (N · m)	10-20
TEMPERATURE RANGE: °C	-53 +148

COLOR



**SEALANT FOR THREADS AND ACCESSORIES**  
 · Contains liquid PTFE, suitable for the locking and sealing of metal threaded pipes and fittings in hydraulic hoses, pneumatic connections of fuel lines, brakes and air compressors · Provides a flexible film that prevents leaks, replacing the need for PTFE tape and hemp wire · Instant sealing for moderate pressures · Low strength · Medium viscosity · Easy to dismantle.

MANIPULATION TIME (minutes)	10-20
WORKING TIME (hours)	1-3
VISCOSITY (25°C) mPa · s	9.000-25.000
FILL CAPACITY (Max.) Mm	0,30

RESISTANCE TO TORSION (BREAKING) (N · m)	4-6
RESISTANCE TO TORSION (RESIDUAL) (N · m)	1-2
TEMPERATURE RANGE: °C	-53 +148

COLOR



**LIQUID PTFE THREAD SEALANT**  
 · Suitable for sealing threaded, metal joints · Replaces PTFE TAPE for the sealing of water, gases, hydrocarbons and other chemicals · Suitable for use in Drinking Water systems · Certified for use in gas installations, according to EN 751-1 · Thixotropic and very resistant to vibrations · Low-Medium strength · High viscosity · Relatively easy to dismantle

MANIPULATION TIME (minutes)	15-30
WORKING TIME (hours)	1-3
VISCOSITY (25°C) mPa · s	16.000-33.000
FILL CAPACITY (Max.) Mm	0,50

RESISTANCE TO TORSION (BREAKING) (N · m)	8-11
RESISTANCE TO TORSION (RESIDUAL) (N · m)	4-6
TEMPERATURE RANGE: °C	-53 +148

COLOR

### RETAINERS & GASKETS



**BEARING FIXER**  
 · Suitable for fastening bearings, sleeves, shafts, keys, pins and bearing shells with sliding adjustment · Protects the joint against corrosion · Resistant to vibrations · Medium strength · Medium viscosity · Relatively difficult to dismantle.

MANIPULATION TIME (minutes)	10-15
WORKING TIME (hours)	1-3
VISCOSITY (25°C) mPa · s	1.100-1.500
FILL CAPACITY (Max.) Mm	0,2

RESISTANCE TO TORSION (BREAKING) (N · m)	15-17
RESISTANCE TO TORSION (RESIDUAL) (N · m)	16-19
TEMPERATURE RANGE: °C	-53 +148

COLOR



**AXLE FIXER**  
 · Used for fixing and sealing shafts, threads and seals in cylindrical elements · High resistance · Quick curing · High tolerances of machining, good gap filling capacity · High strength · High viscosity · Difficult to dismantle.

MANIPULATION TIME (minutes)	8-15
WORKING TIME (hours)	1-3
VISCOSITY (25°C) mPa · s	2.100-2.900
FILL CAPACITY (Max.) Mm	0,25

RESISTANCE TO TORSION (BREAKING) (N · m)	40-50
RESISTANCE TO TORSION (RESIDUAL) (N · m)	30-40
TEMPERATURE RANGE: °C	-50 +150

COLOR




**GASKET SEALANT**  
 · Suitable for sealing close fitting joints between rigid metal faces and flanges, and close fitting-metal surfaces · Replaces the preformed joints, forming a flexible and elastic film · Thixotropic: reducing the migration of liquid product after application to the substrate · Resistant to vibrations, impacts and temperature · Medium strength · High viscosity · Easy to dismantle.

MANIPULATION TIME (minutes)	15-30
WORKING TIME (hours)	3-6
VISCOSITY (25°C) mPa · s	22.000-34.000
FILL CAPACITY (Max.) Mm	0,50

RESISTANCE TO TORSION (BREAKING) (N · m)	4-6
RESISTANCE TO TORSION (RESIDUAL) (N · m)	2-4
TEMPERATURE RANGE: °C	-53 +120

COLOR

### LOCKS & BOLTS




**SCREW LOCKER**  
 · Suitable for the locking and sealing of threaded fasteners which require easy disassembly with a standard hand tool · Recommended maximum screw size: M-36 · Resistant to shocks and vibrations · Protects the joint against corrosion · Wide range of temperatures · Low strength · Low viscosity · Easy to dismantle.

MANIPULATION TIME (minutes)	10-20
WORKING TIME (hours)	1-3
VISCOSITY (25°C) mPa · s	1.000-5.000
FILL CAPACITY (Max.) Mm	0,018

RESISTANCE TO TORSION (BREAKING) (N · m)	5,5-11,5
RESISTANCE TO TORSION (RESIDUAL) (N · m)	2-5,5
TEMPERATURE RANGE: °C	-53 +148

COLOR




**NUT LOCKER**  
 · Suitable for the locking and sealing of threaded fasteners which require normal disassembly with standard hand tools · Recommended maximum screw M-36 · Resistant to vibrations · Protects the joint against corrosion · Medium strength · Medium viscosity · Easy to dismantle.

MANIPULATION TIME (minutes)	5-10
WORKING TIME (hours)	1-3
VISCOSITY (25°C) mPa · s	1.300-2.900
FILL CAPACITY (Max.) Mm	0,04

RESISTANCE TO TORSION (BREAKING) (N · m)	20-24
RESISTANCE TO TORSION (RESIDUAL) (N · m)	5-7
TEMPERATURE RANGE: °C	-53 +148

COLOR




**PENETRATING LOCKER**  
 · For the locking and sealing of threaded fasteners · Suitable for fixing and sealing parts that are already assembled, due to its low viscosity which allows it to penetrate between parts · Allows for small adjustments after installation · Frequently used for filling pores in welds, castings and powdered metal parts · Recommended maximum screw M-5 · Medium/High strength · Low viscosity.

MANIPULATION TIME (minutes)	5-10
WORKING TIME (hours)	1-3
VISCOSITY (25°C) mPa · s	8-12
FILL CAPACITY (Max.) Mm	0,1

RESISTANCE TO TORSION (BREAKING) (N · m)	2,25-11,5
RESISTANCE TO TORSION (RESIDUAL) (N · m)	22,5-40
TEMPERATURE RANGE: °C	-53 +148

COLOR



**STUD LOCKER**  
 · Suitable for permanently fixing stud locks, nuts, threaded pins and bolts that do not need to be disassembled · High resistance · Protects the joint against corrosion · Recommended maximum screw M-20 · High strength · Low viscosity · Very difficult to dismantle.

MANIPULATION TIME (minutes)	20-30
WORKING TIME (hours)	1-3
VISCOSITY (25°C) mPa · s	400-600
FILL CAPACITY (Max.) Mm	0,018


RESISTANCE TO TORSION (BREAKING) (N · m)	22,5-34
RESISTANCE TO TORSION (RESIDUAL) (N · m)	28-40
TEMPERATURE RANGE: °C	-53 +148

COLOR

# Résines anaérobies

## Spécifications techniques

### JOINTS FILETÉS



**1277**  
**VERROUILLAGE PERMANENT. FIXATEUR DE FILETAGE**  
 · Convient pour l'étanchéité des attaches métalliques filetées avec grands espaces · Étanchéité rapide · De grande tolérance grâce à sa forte capacité de remplissage · Grande résistance · Viscosité moyenne · Démontage très difficile

TEMPS DE MANIPULATION (minutes)	15-30
DURÉE DU TRAVAIL (heures)	3-6
VISCOSITÉ (23 °C)	6.000-7.000
CAPACITÉ DE REMPLISSAGE (max.) Mm	0,25


RÉSISTANCE À LA TORSION / RUPTURE	28-40
RÉSISTANCE À LA TORSION / RESIDUELLE	28-40
RANG DE TEMPÉRATURE °C	-53 +148



**1542**  
**PRESSION ÉLEVÉE. VERROUILLAGE HYDRAULIQUE**  
 · Étanchéité de joints filetés fins pour les installations de haute pression hydraulique ou pneumatiques · Supporte jusqu'à 200 bars · Remplace les rubans PTFE pour l'étanchéité d'eau, gaz, hydro-charbons, huile et autres produits chimiques · Résiste aux vibrations, à la chaleur et à la pression · Résistance moyenne · Faible viscosité · Démontage moyennement difficile.

TEMPS DE MANIPULATION (minutes)	15-30
DURÉE DU TRAVAIL (heures)	1-3
VISCOSITÉ (23 °C)	400-800
CAPACITÉ DE REMPLISSAGE (max.) Mm	0,15

RÉSISTANCE À LA TORSION / RUPTURE	12-15
RÉSISTANCE À LA TORSION / RESIDUELLE	10-20
RANG DE TEMPÉRATURE °C	-53 +148



**1511**  
**ÉTANCHÉITÉ DE VISES ET ACCESSOIRES**  
 · Contient PTFE liquide, convient au verrouillage et étanchéité de tubes et accessoires filetés métalliques hydrauliques, raccords pneumatiques de canalisation de combustibles, circuits de freins et compresseurs · Forme une pellicule flexible qui prévient les fuites, remplace le ruban PTFE et la pâte à joints · Étanchéité immédiate pour pressions modérées · Faible résistance · Viscosité moyenne · Démontage facile.

TEMPS DE MANIPULATION (minutes)	10-20
DURÉE DU TRAVAIL (heures)	1-3
VISCOSITÉ (23 °C)	9.000-25.000
CAPACITÉ DE REMPLISSAGE (max.) Mm	0,30

RÉSISTANCE À LA TORSION / RUPTURE	4-6
RÉSISTANCE À LA TORSION / RESIDUELLE	1-2
RANG DE TEMPÉRATURE °C	-53 +148



**PTFE LIQUIDO**  
**8637**  
**PTFE LIQUIDE POUR RACCORDS MÉTALLIQUES FILETÉS**  
 · Assure l'étanchéité des joints métalliques filetés · Remplace le ruban PTFE pour l'étanchéité de l'eau, des gaz, les hydrocarbures et autres produits chimiques · Convient pour une utilisation dans les systèmes d'eau potable · Certifié pour une utilisation dans les installations de gaz, conformément à la norme EN 751-1 · Thixotrope et très résistant aux vibrations · Résistance Faible/Moyenne · Haute viscosité · Démontage relativement facile.

TEMPS DE MANIPULATION (minutes)	15-30
DURÉE DU TRAVAIL (heures)	1-3
VISCOSITÉ (23 °C)	16.000-33.000
CAPACITÉ DE REMPLISSAGE (max.) Mm	0,50

RÉSISTANCE À LA TORSION / RUPTURE	8-11
RÉSISTANCE À LA TORSION / RESIDUELLE	4-6
RANG DE TEMPÉRATURE °C	-53 +148




### DISPOSITIFS DE RETENUE ET JOINTS



**1641**  
**FIXATEUR DE ROULEMENTS**  
 · Convient pour la fixation de roulements, manchons, axes, clavettes, passants, douilles avec réglage par glissement · Protège l'union contre la corrosion · Résiste aux vibrations · Moyenne résistance · Moyenne viscosité · Démontage de moyenne difficulté.

TEMPS DE MANIPULATION (minutes)	10-15
DURÉE DU TRAVAIL (heures)	1-3
VISCOSITÉ (23 °C)	1.100-1.500
CAPACITÉ DE REMPLISSAGE (max.) Mm	0,2


RÉSISTANCE À LA TORSION / RUPTURE	15-17
RÉSISTANCE À LA TORSION / RESIDUELLE	16-19
RANG DE TEMPÉRATURE °C	-53 +148



**1638**  
**FIXATEUR D'AXES**  
 · Convient pour le verrouillage et étanchéité d'axes, écrous et pièces de retenue dans les éléments cylindriques · Haute résistance · Séchage rapide · Grande tolérance dans les processus mécaniques, bonne capacité de remplissage · Haute résistance · Haute viscosité · Démontage difficile.

TEMPS DE MANIPULATION (minutes)	8-15
DURÉE DU TRAVAIL (heures)	1-3
VISCOSITÉ (23 °C)	2.100-2.900
CAPACITÉ DE REMPLISSAGE (max.) Mm	0,25

RÉSISTANCE À LA TORSION / RUPTURE	40-50
RÉSISTANCE À LA TORSION / RESIDUELLE	30-40
RANG DE TEMPÉRATURE °C	-50 +150




**1574**  
**ÉTANCHÉITÉ DE JOINTS**  
 · Convient pour pièces métalliques rigides, formation et étanchéité de joints plats · Remplace les joints préformés formant une pellicule souple et élastique · Thixotrope, facilite l'application et empêche l'écoulement pendant le séchage · Résiste aux vibrations, aux chocs et au changement de température · Résistance moyenne · Haute viscosité · Démontage facile.

TEMPS DE MANIPULATION (minutes)	15-30
DURÉE DU TRAVAIL (heures)	3-6
VISCOSITÉ (23 °C)	22.000-34.000
CAPACITÉ DE REMPLISSAGE (max.) Mm	0,50

RÉSISTANCE À LA TORSION / RUPTURE	4-6
RÉSISTANCE À LA TORSION / RESIDUELLE	2-4
RANG DE TEMPÉRATURE °C	-53 +120




### VERROUS & FIXATEURS



**1222**  
**FIXATION DE VIS**  
 · Pour la fixation des vis et des écrous qui nécessitent être démontés avec des outils habituels · Vis maximale recommandée M-36 · Résiste aux vibrations et aux chocs · Il protège l'union contre la corrosion · Accepte de grands changements de température · Faible résistance · Faible viscosité · Démontage facile.

TEMPS DE MANIPULATION (minutes)	10-20
DURÉE DU TRAVAIL (heures)	1-3
VISCOSITÉ (23 °C)	1.000-5.000
CAPACITÉ DE REMPLISSAGE (max.) Mm	0,018


RÉSISTANCE À LA TORSION / RUPTURE	5,5-11,5
RÉSISTANCE À LA TORSION / RESIDUELLE	2-5,5
RANG DE TEMPÉRATURE °C	-53 +148



**1243**  
**FIXATION D'ÉCROUS**  
 · Pour la fixation des vis et des écrous qui nécessitent être démontés avec des outils habituels · Vis maximale recommandée M-36 · Résiste aux vibrations · Il protège l'union contre la corrosion · Résistance moyenne · Viscosité moyenne · Démontage facile.

TEMPS DE MANIPULATION (minutes)	5-10
DURÉE DU TRAVAIL (heures)	1-3
VISCOSITÉ (23 °C)	1.300-2.900
CAPACITÉ DE REMPLISSAGE (max.) Mm	0,04


RÉSISTANCE À LA TORSION / RUPTURE	20-24
RÉSISTANCE À LA TORSION / RESIDUELLE	5-7
RANG DE TEMPÉRATURE °C	-53 +148



**1290**  
**PÉNÉTRANT**  
 · Pour le verrouillage et l'étanchéité des pièces qui requièrent peu de réglage après installation · Très grande utilité pour le scellement des pores dans les moules métalliques et autres pièces · Faible viscosité, très pénétrant · Vis maximale recommandée M-5 · Moyenne/Haute résistance.

TEMPS DE MANIPULATION (minutes)	5-10
DURÉE DU TRAVAIL (heures)	1-3
VISCOSITÉ (23 °C)	8-12
CAPACITÉ DE REMPLISSAGE (max.) Mm	0,1

RÉSISTANCE À LA TORSION / RUPTURE	2,25-11,5
RÉSISTANCE À LA TORSION / RESIDUELLE	22,5-40
RANG DE TEMPÉRATURE °C	-53 +148



**1270**  
**FIXATION DE GOIJONS**  
 · Préconisé pour le blocage permanent des goujons, vis, écrous, etc... destinés aux assemblages ne devant normalement pas être démontés · Haute résistance · Protège l'union contre la corrosion · Vis maximale recommandée M-20 · Haute résistance · Faible viscosité · Démontage très difficile.

TEMPS DE MANIPULATION (minutes)	20-30
DURÉE DU TRAVAIL (heures)	1-3
VISCOSITÉ (23 °C)	400-600
CAPACITÉ DE REMPLISSAGE (max.) Mm	0,018

RÉSISTANCE À LA TORSION / RUPTURE	22,5-34
RÉSISTANCE À LA TORSION / RESIDUELLE	28-40
RANG DE TEMPÉRATURE °C	-53 +148





7901

## Stainless steel Acier inoxydable Acero inoxidable

High liquid steel content. Renews and protects.

Contenu en acier liquide élevé. Renove et protège.

Alto contenido de acero líquido. Renueva y protege.

7901	Spray 400 ml	12/box	8414646790102
------	--------------	--------	---------------



7913

## Zinc spray Galvanisant Zincante

Rust protector. Pure Zinc 98%.

Protecteur antirouille. Zinc pur à 98%.

Protector antioxidación. Zinc puro al 98%.

7913	Spray 400 ml	12/box	8414646791307
------	--------------	--------	---------------



7924

## Chain grease Graisse de chaines Grasa cadenas

Multi-purpose lubricant protector. Non-greasy and solvent-free.

Lubrifiant protecteur multi-usage. Non gras. Sans solvant.

Lubricante protector multiusos. No grasa y no contiene disolventes.

7924	Spray 400 ml	12/box	8414646792403
------	--------------	--------	---------------



## Multi-purpose oil Huile multi-usages Aceite multiusos

7 different uses. Highly Penetrating. Does not corrode metal or rubber. Lubricates and protects.

7 utilisations différentes. Très pénétrant. Ne corrode pas le métal et le caoutchouc. Lubrifie et protège.

Con 7 funciones. Fuerte poder penetrante. No corroe metal, ni goma y funciona como lubricante y protector.

7911	Spray 400 ml	12/box	8414646791109
7912	Spray 200 ml	12/box	8414646791208

7911



7912

## Multi-purpose grease Graisse multi-usages Grasa multiusos

Universal lubricant. Lubricates and protects. Prevents rusting.

Lubrifiant universel. Lubrifie et protège sans s'oxyder avec le temps ou les températures élevées.

Lubricante universal. Lubrica y protege sin oxidarse por el tiempo y las altas temperaturas.

7904	Spray 400 ml	12/box	8414646790409
------	--------------	--------	---------------



7904

## Silicone spray Spray silicone Silicona spray

Multi-purpose lubricant protector. Non-greasy and solvent-free.

Lubrifiant protecteur multi-usage. Non gras. Sans solvant.

Lubricante protector multiusos. No graso y no contiene disolventes.

7910	Spray 400 ml	12/box	8414646791000
------	--------------	--------	---------------



7910



## Structural adhesives Adhésifs structurels Adhesivos estructurales

Metalacrylate based structural adhesive for bonding plastic and metal.

Adhésif structurel a base de métalacrylate pour coller le plastique et le métal.

Adhesivo estructural en base metacrilato, para pegado de plásticos y metales.



7301	Syringe 400ml **	12/box
7302	Syringe 50ml **	12/box

\*Check availability



7301



7302

## Gympal 7523 – publicity banners Gympal 7523 – panneau publicitaire Gympal 7523 – vallas publicitarias

Cellulose based adhesive in flakes, for hanging publicity posters or banners. Weatherproof. Fast and easy to prepare with cold water, without forming lumps.

Colle en flocons à base de dérivés cellulosiques, spécialement conçue pour le collage d'affiches publicitaires. Bonne résistance à la pluie. Préparation rapide en eau froide, ne forme pas de grumeaux.

Adhesivo en escamas con derivado celulósico, especialmente indicado para fijación de carteles en vallas publicitarias. Buena resistencia a la lluvia. Preparación rápida en agua fría sin formación de grumos.



1110

1110	GYMPAL 7523, Bag 22Kg *	1 (22Kg) U/C	8414646111006
------	-------------------------	--------------	---------------

\*Consulte disponibilidad

# Alphabetical Index

Ref.	Product	Pág.
7967	360° Marker paint, BLUE MARKER PAINT, 12 U/C	30
7966	360° Marker paint, GREEN MARKER PAINT, 12 U/C	30
7965	360° Marker paint, RED MARKER PAINT, 12 U/C	30
7968	360° Marker paint, YELLOW MARKER PAINT, 12 U/C	30
4017	Adhesive for PVC sheeting, Metal can 1 L without brush, 12/box,	20
4018	Adhesive for PVC sheeting, Metal can 500 ml without brush, 12/box,	20
8465	Aluminium tapes Aluminium tape, roll 10 m x 50 mm, 30 micras	34
8482	Aluminium tapes Aluminium tape, roll 50 m x 50 mm, 50 micras	34
8490	Aluminium tapes, Roll 10 m x 50 mm, 30 micras, 24/box	34
8432	Aluminium tapes, Roll 10 m x 50 mm, 30 micras, 24/box	34
8403	Aluminium tapes, Roll 10 m x 50 mm, 50 micras, 24/box	34
8434	Aluminium tapes, Roll 45 m x 50 mm, 30 micras, 24/box	34
8499	Aluminium tapes, Roll 50 m x 50 mm, 30 micras, 24/box	34
8439	Aluminium tapes, Roll 50 m x 50 mm, 50 micras, 24/box	34
8414	Aluminium tapes, Roll 50 m x 75 mm, 30 micras, 24/box	34
8614	ANAEROBIC ADHESIVE AXLE RETAINER, Bottle 50 ml	61
8615	ANAEROBIC ADHESIVE BALL BEARINGS, Bottle 50 ml	61
8609	ANAEROBIC ADHESIVE GASKET SEALANT, Bottle 50 ml	61
8629	ANAEROBIC ADHESIVE HYDRAULIC, Bottle 50 ml	61
8608	ANAEROBIC ADHESIVE NUT LOCK, Bottle 50 ml	61
8612	ANAEROBIC ADHESIVE SCREW LOCK, Bottle 50 ml	61
8616	ANAEROBIC ADHESIVE STUD LOCK, Bottle 50 ml	61
8645	ANAEROBIC ADHESIVE STUD LOCK, Bottle 50 ml	61
8628	ANAEROBIC ADHESIVE THREAD LOCK, Bottle 50 ml	61
331	Anti-mould agent, Spray 750 ml, 10/box	23
7708	Anti-mould Sealing Tape, Roll 5 m x 30 mm in box, 12/box	36
356	Anti-slip spray, Jerry can 1L, 10/box	33
7900	Anti-slip spray, Spray 200 ml, 12/box	33
8401	Anti-slip tape, Roll 10 m x 50 mm, BLACK, 12/box	41
7704	Anti-slip tape, Roll 10m x 50mm, TRANSPARENT, 12/box	41
7706	Anti-slip tape, Roll 5m x 25mm, LUMINESCENT, 12/box	41
7707	Anti-slip tape, Roll 5m x 50mm, YELLOW-BLACK, 12/box	41
8313	Assembly putty Cartridge 310 ml	48
8311	Assembly putty Tube 150 g	48
8214	Cable installation lubricant, Bottle 1L, 12/box	22
7607	Caulking gun with teeth	48
332	Cement remover, Bottle 1 L, 10/box	23
352	Cement remover, Jerry can 5 L, 4/box	23
7924	Chain grease Spray 400 ml	64
8642	Chemical welder, Bottle with individual box 10 ml, 24/box	28
C02430	Concentrated Caustic Soda Pipe Unblocker, Bottle 500ml, 12/box	24
	CPVC Cement HEAVY ASTM Metal can with cotton ball applicator, 118ml (4 fl.oz. 1/4 pint), ORANGE / NARANJA 24/box	19
	CPVC Cement HEAVY ASTM Metal can with cotton ball applicator, 237ml (8 fl.oz. 1/2 pint), ORANGE / NARANJA 24/box	19
	CPVC Cement HEAVY ASTM Metal can with cotton ball applicator, 473ml (16 fl.oz. 1 pint), ORANGE / NARANJA 1/2 box	19
	CPVC Cement HEAVY ASTM Metal can with cotton ball applicator, 946ml (32 fl.oz. 1 quart), ORANGE / NARANJA 12/box	19
	CPVC Cement MEDIUMASTM Metal can with cotton ball applicator, 118ml (4 fl.oz. 1/4 pint), ORANGE / NARANJA 24/box	19
	CPVC Cement MEDIUMASTM Metal can with cotton ball applicator, 237ml (8 fl.oz. 1/2 pint), ORANGE / NARANJA 24/box	19
	CPVC Cement MEDIUMASTM Metal can with cotton ball applicator, 473ml (16 fl.oz. 1 pint), ORANGE / NARANJA 1/2 box	19
	CPVC Cement MEDIUMASTM Metal can with cotton ball applicator, 946ml (32 fl.oz. 1 quart), ORANGE / NARANJA 12/box	19
	CPVC Pro, Plastic pot with brush, 1 L	17
	CPVC Pro, Plastic pot with brush, 250 ml	17
	CPVC Pro, Plastic pot with brush, 500 ml	17
7131	Cyanoacrylate, extra fast, bottle 20 gr	59
7117	Cyanoacrylate, extra fast, bottle 50 gr	59
7154	Cyanoacrylate, flexible, bottle 20 gr	59
7264	Cyanoacrylate, flexible, bottle 50 gr	59
7134	Cyanoacrylate, general purpose, bottle 20 gr	59
7120	Cyanoacrylate, general purpose, bottle 50 gr	59

Ref.	Product	Pág.
7159	Cyanoacrylate, plastics, bottle 20 gr	59
7153	Cyanoacrylate, plastics, bottle 50 gr	59
7121	Cyanoacrylate, porous materials, bottle 20 gr	59
7122	Cyanoacrylate, porous materials, bottle 50 gr	59
C01540	Desincrustante para trituradores de WC, Garrafa 5 L, 3/box	23
8950	Display stand, 1 m x 2 m x 0.5 m	42
8426	Double-sided tape, Roll 5 m x 19 mm individual box, 12/box	41
C02220	Drain cleaner, Bottle 1 L, 10/box	24
8407	Duct tape, Roll 10 m x 50 mm, 24/box	41
8412	Duct tape, Roll 25 m x 50 mm, 12/box	41
8466	Electrical PVC tape, Roll 15 m x 19 mm, 24/box	40
8437	Electrical PVC tape, Roll 20 m x 19 mm, 48/box	40
5160	Enamel Restorer, Bottle with brush, Blister 20 ml, 24/box	33
8109	Epoxy putty, Bag 500 g (2x250 g), 10/box	32
8102	Epoxy putty, Blister 2 components 75 g, 24/box	32
8120	Epoxy putty, Tube in blister 60 g, 12/box	32
8121	Epoxy putty, Tube with euroslot 125 g, 24/box	32
4014	Expanded polystyrene adhesive Can, 1 L	52
5004	Extra strong, fast white glue Jerry can 30 Kg	52
5002	Extra strong, fast white glue Jerry can 6 Kg	52
5147	Fast-drying white glue, transparent finish Blister, bottle 50 g	51
5181	Fast-drying white glue, transparent finish Bottle 125 g	51
5191	Fast-drying white glue, transparent finish Bottle 250 g	51
7957	Gas leak detector, Spray 400 ml, 12/box	30
1110	Gympal 7523 – publicity banners Bag 22Kg	67
2209	Hard plastic adhesive Plastic tube 60 ml	53
306	Hemp, Bag 200 g, 24/box	26
300	Hemp, Dispenser 80 g, 12/box	26
6208	Instant glue Blister, 3 tubes 1 g	53
6262	Instant glue Blister, bottle with brush 8 g	53
6236	Instant glue Blister, tube 3 g	53
7155	Mitre kit, Aerosol 200 ml	59
7156	Mitre kit, Bottle 50 gr + Aerosol 200 ml	59
8505	MS polymer sealant, multipurpose Cartridge 280 ml	46
8506	MS polymer sealant, multipurpose Cartridge 280 ml	46
3410	Multi-purpose contact adhesive Blister con Tube 60 ml	50
3225	Multi-purpose contact adhesive Pot with brush 500 ml	50
3219	Multi-purpose contact adhesive Tube 1 L	50
3222	Multi-purpose contact adhesive Tube 125 ml	50
3221	Multi-purpose contact adhesive Tube 250 ml	50
3220	Multi-purpose contact adhesive Tube 500 ml	50
7904	Multi-purpose grease Spray 400 ml	65
7912	Multi-purpose oil Spray 200 ml	65
7911	Multi-purpose oil Spray 400 ml	65
8586	Multipurpose silicone Cartridge 280 ml, TRANSLUCENT	45
8585	Multipurpose silicone Cartridge 280 ml, WHITE	45
8527	Neutral silicone Cartridge 300 ml, TRANSLUCENT	44
8526	Neutral silicone Cartridge 300 ml, WHITE	44
8207	O-ring lubricant, Bucket 2,5 L, 4*/box	22
8205	O-ring lubricant, Bucket 5 L, 2 (10L)/box	22
8204	O-ring lubricant, Tube 1 L, 12*/box	22
8220	O-ring lubricant, Tube 150 ml, 24/box	22
8459	Packing tape, Roll 132 m x 50 mm, BROWN, 36/box	40
8460	Packing tape, Roll 132 m x 50 mm, TRANSPARENT, 36/box	40
8463	Packing tape, Roll 66 m x 50 mm, BROWN, 36/box	40
8464	Packing tape, Roll 66 m x 50 mm, TRANSPARENT, 36/box	40
128	PE cleaner, Metal can 500 ml, 6/box	21
3228	Pipe insulation adhesive, Metal can 1 L with brush, 12*/box,	20
3229	Pipe insulation adhesive, Metal can 500 ml with brush, 12*/box,	20
8435	Pipe insulation tape, Roll 15 m x 50 mm, BLACK, 12/box	35
7703	Pipe insulation tape, Roll 15 m x 50 mm, WHITE, 12/box	35
400	Pipe repair bandage, Individual box, 5 cm x 130 cm, 12/box	32
307	Plumber's putty, Pot 150 g, 12/box	26
322	Plumber's putty, Pot 400 g, 12/box	26
333	Plumber's putty, Tube 100 g, 12/box	26
7007	Plumbing flux and wire wool, Pot with brush 100 g, GEL, 12/box	29
7004	Plumbing flux and wire wool, Pot with brush 100 ml, LIQUID, 12/box	29
7005	Plumbing flux and wire wool, Pot with brush 140 g, PASTE, 24/box	29
8705	Polyurethane Foam Cleaner Caulking gun cleaner	47
8704	Polyurethane Foam Cleaner Spray 500 ml	47

# Alphabetical Index

Ref.	Product	Pág.
8702	Polyurethane foam Gun Spray 750 ml	47
8701	Polyurethane foam Spray 750 ml	47
7802	Polyurethane putty Cartridge 300 ml, GREY	47
7801	Polyurethane putty Cartridge 300 ml, WHITE	47
8524	Pools MS Sealant. Tube 150g	46
3218	Professional contact adhesive Metal Can 5 L	50
354	Professional limescale cleaner, Bottle 1 L, 10/box	23
329	Professional limescale cleaner, Jerry can 5 L, 4/box	23
302	Professional pipe unblocker, Bottle 1 L (2 kilos), 6/box	24
301	Professional pipe unblocker, Bottle 500 ml (1 kilo), 12/box	24
8438	PTFE tape, Roll 12 m x 12 mm x 0,075mm, 0.28 g/cm <sup>3</sup> , 250/box	38
8442	PTFE tape, Roll 12 m x 12 mm x 0,075mm, 0.35 g/cm <sup>3</sup> , 250/box	38
8456	PTFE tape, Roll 12 m x 12 mm x 0,1 mm, 0.35 g/cm <sup>3</sup> , 250/box	38
8477	PTFE tape, Roll 12 m x 12 mm x 0,1 mm, 0.70g/cm <sup>3</sup> , 250/box	38
8492	PTFE tape, Roll 25 m x 25 mm x 0,2 mm, 0.40 g/cm <sup>3</sup> , 25/box	38
8440	PTFE tape, Roll 50 m x 19 mm x 0,1 mm, 0.40 g/cm <sup>3</sup> , 25/box	38
8457	PTFE tape, Roll 50 m x 19 mm x 0,1 mm, 0.52 g/cm <sup>3</sup> , 25/box	38
8441	PTFE tape, Roll 50 m x 25 mm x 0,1 mm, 0.52 g/cm <sup>3</sup> , 25/box	38
2905	PVC Cement HEAVYASTM Metal can with cotton ball applicator, 118ml (4 fl.oz. 1/4 pint), CLEAR / TRANSPARENTE2 4/box	18
	PVC Cement HEAVYASTM Metal can with cotton ball applicator, 118ml (4 fl.oz. 1/4 pint), GRAY / GRIS2 4/box	18
2904	PVC Cement HEAVYASTM Metal can with cotton ball applicator, 237ml (8 fl.oz. 1/2 pint), CLEAR / TRANSPARENTE2 4/box	18
2932	PVC Cement HEAVYASTM Metal can with cotton ball applicator, 237ml (8 fl.oz. 1/2 pint), GRAY / GRIS2 4/box	18
2903	PVC Cement HEAVYASTM Metal can with cotton ball applicator, 473ml (16 fl.oz. 1 pint), CLEAR / TRANSPARENTE 12/box	18
2581	PVC Cement HEAVYASTM Metal can with cotton ball applicator, 473ml (16 fl.oz. 1 pint), GRAY / GRIS 12/box	18
2937	PVC Cement HEAVYASTM Metal can with cotton ball applicator, 946ml (32 fl.oz. 1 quart), CLEAR / TRANSPARENTE 12/box	18
2936	PVC Cement HEAVYASTM Metal can with cotton ball applicator, 946ml (32 fl.oz. 1 quart), GRAY / GRIS 12/box	18
2908	PVC Cement MEDIUMASTM Metal can with cotton ball applicator, 118ml (4 fl.oz. 1/4 pint) CLEAR / TRANSPARENTE2 4/box	18
2946	PVC Cement MEDIUMASTM Metal can with cotton ball applicator, 118ml (4 fl.oz. 1/4 pint) GRAY / GRIS 24/box	18
2907	PVC Cement MEDIUMASTM Metal can with cotton ball applicator, 237ml (8 fl.oz. 1/2 pint) CLEAR / TRANSPARENTE2 4/box	18
2945	PVC Cement MEDIUMASTM Metal can with cotton ball applicator, 237ml (8 fl.oz. 1/2 pint) GRAY / GRIS 24/box	18
2906	PVC Cement MEDIUMASTM Metal can with cotton ball applicator, 473ml (16 fl.oz. 1 pint) CLEAR / TRANSPARENTE 12/box	18
2944	PVC Cement MEDIUMASTM Metal can with cotton ball applicator, 473ml (16 fl.oz. 1 pint) GRAY / GRIS 12/box	18
	PVC Cement MEDIUMASTM Metal can with cotton ball applicator, 946ml (32 fl.oz. 1 quart) CLEAR / TRANSPARENTE 12/box	18
	PVC Cement MEDIUMASTM Metal can with cotton ball applicator, 946ml (32 fl.oz. 1 quart) GRAY / GRIS 12/box	18
	PVC Cement REGULARASTM Metal can with cotton ball applicator, 118ml (4 fl.oz. 1/4 pint), CLEAR / TRANSPARENTE2	18
2986	PVC Cement REGULARASTM Metal can with cotton ball applicator, 237ml (8 fl.oz. 1/2 pint), CLEAR / TRANSPARENTE2	18
2987	PVC Cement REGULARASTM Metal can with cotton ball applicator, 473ml (16 fl.oz. 1 pint), CLEAR / TRANSPARENTE	18
2988	PVC Cement REGULARASTM Metal can with cotton ball applicator, 946ml (32 fl.oz. 1 quart), CLEAR / TRANSPARENTE	18
2911	PVC Cement wet & dry MEDIUMASTM Metal can with cotton ball applicator, 118ml (4 fl.oz. 1/4 pint), BLUE / AZUL2 4/box	19
2910	PVC Cement wet & dry MEDIUMASTM Metal can with cotton ball applicator, 237ml (8 fl.oz. 1/2 pint), BLUE / AZUL2 4/box	19
2909	PVC Cement wet & dry MEDIUMASTM Metal can with cotton ball applicator, 473ml (16 fl.oz. 1 pint), BLUE / AZUL1 2/box	19
2984	PVC Cement wet & dry MEDIUMASTM Metal can with cotton ball applicator, 946ml (32 fl.oz. 1 quart), BLUE / AZUL1 2/box	19
205	PVC cleaner, Metal can 1 L, 12*/box	21
206	PVC cleaner, Metal can 500 ml, 12*/box	21
133	PVC cleaner, Plastic bottle 1 L, 20*/box	21
207	PVC cleaner, Plastic bottle 250 ml, 35*/box	21
215	PVC cleaner, Plastic bottle 500 ml, 24*/box	21
2074	PVC Express, Tube 125 ml, 30/Box	17
2060	PVC G-10, Aluminium tube 125 ml	15
2062	PVC G-10, Metal can 1 L with brush	15
2076	PVC G-10, Metal can 1 L without brush	15
2056	PVC G-10, Metal can 250 ml with brush	15
2063	PVC G-10, Metal can 500 ml with brush	15
2072	PVC G-10, Metal can 500 ml without brush	15
2045	PVC Gel, Plastic pot 1 L with brush	16
2289	PVC Gel, Plastic pot 250 ml with brush	16
2044	PVC Gel, Plastic pot 500 ml with brush	16
2961	PVC Gel, Plastic pot 500 ml with brush	16
2011	PVC Instant, Metal can 250 ml with brush	16
2053	PVC Instant, Metal can 500 ml with brush	16
2575	PVC Instant, Plastic tube 125 ml	16
2286	PVC New Age, Metal can 1L without brush	12
2228	PVC New Age, Plastic pot 1 L with brush	12

Ref.	Product	Pág.
2272	PVC New Age, Plastic pot 250 ml with brush	12
2229	PVC New Age, Plastic pot 500 ml with brush	12
2243	PVC New Age, Plastic tube 125 ml with euroslot	12
2518	PVC New Age, Plastic tube 60 ml with euroslot	12
2024	PVC Pegafor, Aluminium tube 125 ml with individual box and display box	14
2046	PVC Pegafor, Metal can 1 L with brush	14
2047	PVC Pegafor, Metal can 500 ml with brush	14
8425	PVC tape, Roll 33 m x 50 mm, 12/box	38
2073	PVC Uneplas, Aluminium tube 125 ml	13
2026	PVC Uneplas, Aluminium tube 125 ml with individual box	13
2028	PVC Uneplas, Aluminium tube 125 ml with individual box	13
2040	PVC Uneplas, Metal can 1 L with brush	13
2042	PVC Uneplas, Metal can 1 L without brush	13
2942	PVC Uneplas, Metal Can 2,5 L	13
2002	PVC Uneplas, Metal can 250 ml with brush	13
2041	PVC Uneplas, Metal can 500 ml with brush	13
2043	PVC Uneplas, Metal can 500 ml without brush	13
2009	PVC Uneplas, Plastic pot 1 L with brush	13
2010	PVC Uneplas, Plastic pot 250 ml with brush	13
2023	PVC Uneplas, Plastic pot 500 ml with brush	13
355	Radiator noise silencer, Jerry can 1 L, 6/box	22
8394	Refractory sealant Cartridge 310 ml	48
7614	Reinforced caulking gun	48
3207	Repositionable contact adhesive in spray Aerosol 400 ml	51
8502	Sanitary silicone Cartridge 300 ml, TRANSLUCENT	44
8501	Sanitary silicone Cartridge 300 ml, WHITE	44
6105	Sanitary silicone Sanitary silicone, tube 85 ml with euroslot, translucent	44
6100	Sanitary silicone Sanitary silicone, tube 85 ml with euroslot, white	44
6105	Sanitary silicone Tube 85 ml with euroslot, TRANSLUCENT	44
6100	Sanitary silicone Tube 85 ml with euroslot, WHITE	44
7700	Self-Adhesive Waterproof Sealant, Roll 22 mm x 2,4 m in blister, 24/box	36
8444	Self-amalgamating tape, Roll 2,5 m x 19 mm, 24/box	35
8443	Self-amalgamating tape, Roll 9 m x 19 mm, 22/box	35
7705	Self-Vulcanising Silicone Tape, Roll 3 m x 25 mm, 12/box	35
8448	Signal tape, Roll 200 m x 70 mm, 12/box	40
6112	Silicone in blister, 50 ml tube, TRANSLUCENT	45
6111	Silicone in blister, 50 ml tube, WHITE	45
7910	Silicone spray 400 ml	65
7010	Soldering blanket, 50 cm x 35 cm, BLACK, 1/box	28
7901	Stainless steel Spray 400 ml	64
7009	Stearine, Bar 200 g, 10/box	28
7301	Structural adhesive Syringe 400ml	67
7302	Structural adhesive Syringe 50ml	67
6971	Super cyanoacrylate 1401, Bottle 20g	59
8641	Thread sealant, Squeezy bottle 250 ml, 6/box	26
8637	Thread sealant, Squeezy bottle 50 ml, 12/box	26
8663	Thread sealant, Squeezy bottle 75 ml, 12/box	26
152	Universal Cleaner, Spray 400 ml, 12/box	21
5027	Vinyl adhesive for air-conditioning ducts and geotextile, Bucket 6 Kg, 2 (12Kg)/box,	20
1007	Wallpaper paste Box 125 g	52
7944	Waterproof repair spray, Spray 500 ml, 12/box	30
7702	Waterproof repair tape, Rolls 10 cm x 1,5 m (4 White/4 Black/4 Transp), 12/box	36
8116	White plumber's putty, Pot 1 Kg, 12/box	33
8115	White plumber's putty, Pot 500 g, 12/box	33
7019	Wire wool, Bag 6 pieces, 12/box	29
7016	Wire wool, Pack 10 pieces, 12 cm x 5 cm, 12/box	29
5128	Wood glue Bottle with cannula 125 g	51
5129	Wood glue Bottle with cannula 250 g	51
5113	Wood glue Bottle with cannula 500 g	51
5152	Wood glue Bottle with cannula 750 g	51
5112	Wood glue Tube 1000 g	51
7913	Zinc spray 400 ml	64

# Reference Index

Ref.	Product	Pág.
128	PE cleaner, Metal can 500 ml, 6/box	21
133	PVC cleaner, Plastic bottle 1 L, 20*/box	21
152	Universal Cleaner, Spray 400 ml, 12/box	21
205	PVC cleaner, Metal can 1 L, 12*/box	21
206	PVC cleaner, Metal can 500 ml, 12*/box	21
207	PVC cleaner, Plastic bottle 250 ml, 35*/box	21
215	PVC cleaner, Plastic bottle 500 ml, 24*/box	21
300	Hemp, Dispenser 80 g, 12/box	26
301	Professional pipe unblocker, Bottle 500 ml (1 kilo), 12/box	24
302	Professional pipe unblocker, Bottle 1 L (2 kilos), 6/box	24
306	Hemp, Bag 200 g, 24/box	26
307	Plumber's putty, Pot 150 g, 12/box	26
322	Plumber's putty, Pot 400 g, 12/box	26
329	Professional limescale cleaner, Jerry can 5 L, 4/box	23
331	Anti-mould agent, Spray 750 ml, 10/box	23
332	Cement remover, Bottle 1 L, 10/box	23
333	Plumber's putty, Tube 100 g, 12/box	26
352	Cement remover, Jerry can 5 L, 4/box	23
354	Professional limescale cleaner, Bottle 1 L, 10/box	23
355	Radiator noise silencer, Jerry can 1 L, 6/box	22
356	Anti-slip spray, Jerry can 1L, 10/box	33
400	Pipe repair bandage, Individual box, 5 cm x 130 cm, 12/box	32
1007	Wallpaper paste Box 125 g	52
1110	Gympal 7523 – publicity banners Bag 22Kg	67
2002	PVC Uneplas, Metal can 250 ml with brush	13
2009	PVC Uneplas, Plastic pot 1 L with brush	13
2010	PVC Uneplas, Plastic pot 250 ml with brush	13
2011	PVC Instant, Metal can 250 ml with brush	16
2023	PVC Uneplas, Plastic pot 500 ml with brush	13
2024	PVC Pegafor, Aluminium tube 125 ml with individual box and display box	14
2026	PVC Uneplas, Aluminium tube 125 ml with individual box	13
2028	PVC Uneplas, Aluminium tube 125 ml with individual box	13
2040	PVC Uneplas, Metal can 1 L with brush	13
2041	PVC Uneplas, Metal can 500 ml with brush	13
2042	PVC Uneplas, Metal can 1 L without brush	13
2043	PVC Uneplas, Metal can 500 ml without brush	13
2044	PVC Gel, Plastic pot 500 ml with brush	16
2045	PVC Gel, Plastic pot 1 L with brush	16
2046	PVC Pegafor, Metal can 1 L with brush	14
2047	PVC Pegafor, Metal can 500 ml with brush	14
2053	PVC Instant, Metal can 500 ml with brush	16
2056	PVC G-10, Metal can 250 ml with brush	15
2060	PVC G-10, Aluminium tube 125 ml	15
2062	PVC G-10, Metal can 1 L with brush	15
2063	PVC G-10, Metal can 500 ml with brush	15
2072	PVC G-10, Metal can 500 ml without brush	15
2073	PVC Uneplas, Aluminium tube 125 ml	13
2074	PVC Express, Tube 125 ml, 30/Box	17
2076	PVC G-10, Metal can 1 L without brush	15
2209	Hard plastic adhesive Plastic tube 60 ml	53
2228	PVC New Age, Plastic pot 1 L with brush	12
2229	PVC New Age, Plastic pot 500 ml with brush	12
2243	PVC New Age, Plastic tube 125 ml with euroslot	12
2272	PVC New Age, Plastic pot 250 ml with brush	12
2286	PVC New Age, Metal can 1L without brush	12
2289	PVC Gel, Plastic pot 250 ml with brush	16
2518	PVC New Age, Plastic tube 60 ml with euroslot	12
2575	PVC Instant, Plastic tube 125 ml	16



Ref.	Product	Pág.
2581	PVC Cement HEAVYASTM Metal can with cotton ball applicator, 473ml (16 fl.oz. 1 pint), GRAY / GRIS 12/box	18
2903	PVC Cement HEAVYASTM Metal can with cotton ball applicator, 473ml (16 fl.oz. 1 pint), CLEAR / TRANSPARENTE 12/box	18
2904	PVC Cement HEAVYASTM Metal can with cotton ball applicator, 237ml (8 fl.oz. 1/2 pint), CLEAR / TRANSPARENTE2 4/box	18
2905	PVC Cement HEAVYASTM Metal can with cotton ball applicator, 118ml (4 fl.oz. 1/4 pint), CLEAR / TRANSPARENTE2 4/box	18
2906	PVC Cement MEDIUMASTM Metal can with cotton ball applicator, 473ml (16 fl.oz. 1 pint) CLEAR / TRANSPARENTE 12/box	18
2907	PVC Cement MEDIUMASTM Metal can with cotton ball applicator, 237ml (8 fl.oz. 1/2 pint) CLEAR / TRANSPARENTE2 4/box	18
2908	PVC Cement MEDIUMASTM Metal can with cotton ball applicator, 118ml (4 fl.oz. 1/4 pint) CLEAR / TRANSPARENTE2 4/box	18
2909	PVC Cement wet & dry MEDIUMASTM Metal can with cotton ball applicator, 473ml (16 fl.oz. 1 pint), BLUE / AZUL1 2/box	19
2910	PVC Cement wet & dry MEDIUMASTM Metal can with cotton ball applicator, 237ml (8 fl.oz. 1/2 pint), BLUE / AZUL2 4/box	19
2911	PVC Cement wet & dry MEDIUMASTM Metal can with cotton ball applicator, 118ml (4 fl.oz. 1/4 pint), BLUE / AZUL2 4/box	19
2932	PVC Cement HEAVYASTM Metal can with cotton ball applicator, 237ml (8 fl.oz. 1/2 pint), GRAY / GRIS2 4/box	18
2936	PVC Cement HEAVYASTM Metal can with cotton ball applicator, 946ml (32 fl.oz. 1 quart), GRAY / GRIS 12/box	
2937	PVC Cement HEAVYASTM Metal can with cotton ball applicator, 946ml (32 fl.oz. 1 quart), CLEAR / TRANSPARENTE 12/box	18
2942	PVC Uneplas, Metal Can 2,5 L	13
2944	PVC Cement MEDIUMASTM Metal can with cotton ball applicator, 473ml (16 fl.oz. 1 pint) GRAY / GRIS 12/box	18
2945	PVC Cement MEDIUMASTM Metal can with cotton ball applicator, 237ml (8 fl.oz. 1/2 pint) GRAY / GRIS 24/box	18
2946	PVC Cement MEDIUMASTM Metal can with cotton ball applicator, 118ml (4 fl.oz. 1/4 pint) GRAY / GRIS 24/box	18
2961	PVC Gel, Plastic pot 500 ml with brush	16
2984	PVC Cement wet & dry MEDIUMASTM Metal can with cotton ball applicator, 946ml (32 fl.oz. 1 quart), BLUE / AZUL1 2/box	19
2986	PVC Cement REGULARASTM Metal can with cotton ball applicator, 237ml (8 fl.oz. 1/2 pint), CLEAR / TRANSPARENTE2	18
2987	PVC Cement REGULARASTM Metal can with cotton ball applicator, 473ml (16 fl.oz. 1 pint), CLEAR / TRANSPARENTE	18
2988	PVC Cement REGULARASTM Metal can with cotton ball applicator, 946ml (32 fl.oz. 1 quart), CLEAR / TRANSPARENTE	18
3207	Repositionable contact adhesive in spray Aerosol 400 ml	51
3218	Professional contact adhesive Metal Can 5 L	50
3219	Multi-purpose contact adhesive Tube 1 L	50
3220	Multi-purpose contact adhesive Tube 500 ml	50
3221	Multi-purpose contact adhesive Tube 250 ml	50
3222	Multi-purpose contact adhesive Tube 125 ml	50
3225	Multi-purpose contact adhesive Pot with brush 500 ml	50
3228	Pipe insulation adhesive, Metal can 1 L with brush, 12*/box,	20
3229	Pipe insulation adhesive, Metal can 500 ml with brush, 12*/box,	
3410	Multi-purpose contact adhesive Blister con Tube 60 ml	50
4014	Expanded polystyrene adhesive Can, 1 L	52
4017	Adhesive for PVC sheeting, Metal can 1 L without brush, 12/box,	20
4018	Adhesive for PVC sheeting, Metal can 500 ml without brush, 12/box,	20
5002	Extra strong, fast white glue Jerry can 6 Kg	52
5004	Extra strong, fast white glue Jerry can 30 Kg	52
5027	Vinyl adhesive for air-conditioning ducts and geotextile, Bucket 6 Kg, 2 (12Kg)/box,	20
5112	Wood glue Tube 1000 g	51
5113	Wood glue Bottle with cannula 500 g	51
5128	Wood glue Bottle with cannula 125 g	51
5129	Wood glue Bottle with cannula 250 g	51
5147	Fast-drying white glue, transparent finish Blister, bottle 50 g	51
5152	Wood glue Bottle with cannula 750 g	51
5160	Enamel Restorer, Bottle with brush, Blister 20 ml, 24/box	33
5181	Fast-drying white glue, transparent finish Bottle 125 g	51
5191	Fast-drying white glue, transparent finish Bottle 250 g	51
6100	Sanitary silicone Tube 85 ml with euroslot, WHITE	44
6100	Sanitary silicone Sanitary silicone, tube 85 ml with euroslot, white	44
6105	Sanitary silicone Tube 85 ml with euroslot, TRANSLUCENT	44
6105	Sanitary silicone Sanitary silicone, tube 85 ml with euroslot, translucent	44
6111	Silicone in blister, 50 ml tube, WHITE	45
6112	Silicone in blister, 50 ml tube, TRANSLUCENT	45
6208	Instant glue Blister, 3 tubes 1 g	53
6236	Instant glue Blister, tube 3 g	53
6262	Instant glue Blister, bottle with brush 8 g	53
6971	Super cyanoacrylate 1401, Bottle 20g	59
7004	Plumbing flux and wire wool, Pot with brush 100 ml, LIQUID, 12/box	29
7005	Plumbing flux and wire wool, Pot with brush 140 g, PASTE, 24/box	29
7007	Plumbing flux and wire wool, Pot with brush 100 g, GEL, 12/box	29
7009	Stearine, Bar 200 g, 10/box	28
7010	Soldering blanket, 50 cm x 35 cm, BLACK, 1/box	28
7016	Wire wool, Pack 10 pieces, 12 cm x 5 cm, 12/box	29
7019	Wire wool, Bag 6 pieces, 12/box	29
7117	Cyanoacrylate, extra fast, bottle 50 gr	59
7120	Cyanoacrylate, general purpose, bottle 50 gr	59
7121	Cyanoacrylate, porous materials, bottle 20 gr	59
7122	Cyanoacrylate, porous materials, bottle 50 gr	59
7131	Cyanoacrylate, extra fast, bottle 20 gr	59
7134	Cyanoacrylate, general purpose, bottle 20 gr	59

# Reference Index

Ref.	Product	Pág.
7153	Cyanoacrylate, plastics, bottle 50 gr	59
7154	Cyanoacrylate, flexible, bottle 20 gr	59
7155	Mitre kit, Aerosol 200 ml	59
7156	Mitre kit, Bottle 50 gr + Aerosol 200 ml	59
7159	Cyanoacrylate, plastics, bottle 20 gr	59
7264	Cyanoacrylate, flexible, bottle 50 gr	59
7301	Structural adhesive Syringe 400ml	67
7302	Structural adhesive Syringe 50ml	67
7607	Caulking gun with teeth	48
7614	Reinforced caulking gun	48
7801	Polyurethane putty Cartridge 300 ml, WHITE	47
7802	Polyurethane putty Cartridge 300 ml, GREY	47
7900	Anti-slip spray, Spray 200 ml, 12/box	33
7901	Stainless steel Spray 400 ml	64
7904	Multi-purpose grease Spray 400 ml	65
7910	Silicone spray 400 ml	65
7911	Multi-purpose oil Spray 400 ml	65
7912	Multi-purpose oil Spray 200 ml	65
7913	Zinc spray 400 ml	64
7924	Chain grease Spray 400 ml	64
7944	Waterproof repair spray, Spray 500 ml, 12/box	30
7957	Gas leak detector, Spray 400 ml, 12/box	30
7965	360° Marker paint, RED MARKER PAINT, 12 U/C	30
7966	360° Marker paint, GREEN MARKER PAINT, 12 U/C	30
7967	360° Marker paint, BLUE MARKER PAINT, 12 U/C	30
7968	360° Marker paint, YELLOW MARKER PAINT, 12 U/C	30
8102	Epoxy putty, Blister 2 components 75 g, 24/box	32
8109	Epoxy putty, Bag 500 g (2x250 g), 10/box	32
8115	White plumber's putty, Pot 500 g, 12/box	33
8116	White plumber's putty, Pot 1 Kg, 12/box	33
8120	Epoxy putty, Tube in blister 60 g, 12/box	32
8121	Epoxy putty, Tube with euroslot 125 g, 24/box	32
8204	O-ring lubricant, Tube 1 L, 12*/box	22
8205	O-ring lubricant, Bucket 5 L, 2 (10L)/box	22
8207	O-ring lubricant, Bucket 2,5 L, 4*/box	22
8214	Cable installation lubricant, Bottle 1L, 12/box	22
8220	O-ring lubricant, Tube 150 ml, 24/box	22
8311	Assembly putty Tube 150 g	48
8313	Assembly putty Cartridge 310 ml	48
8394	Refractory sealant Cartridge 310 ml	48
8401	Anti-slip tape, Roll 10 m x 50 mm, BLACK, 12/box	41
8403	Aluminium tapes, Roll 10 m x 50 mm, 50 micras, 24/box	34
8407	Duct tape, Roll 10 m x 50 mm, 24/box	41
8412	Duct tape, Roll 25 m x 50 mm, 12/box	41
8414	Aluminium tapes, Roll 50 m x 75 mm, 30 micras, 24/box	34
8425	PVC tape, Roll 33 m x 50 mm, 12/box	38
8426	Double-sided tape, Roll 5 m x 19 mm individual box, 12/box	41
8432	Aluminium tapes, Roll 10 m x 50 mm, 30 micras, 24/box	34
8434	Aluminium tapes, Roll 45 m x 50 mm, 30 micras, 24/box	34
8435	Pipe insulation tape, Roll 15 m x 50 mm, BLACK, 12/box	35
8437	Electrical PVC tape, Roll 20 m x 19 mm, 48/box	40
8438	PTFE tape, Roll 12 m x 12 mm x 0,075mm, 0.28 g/cm <sup>3</sup> , 250/box	38
8439	Aluminium tapes, Roll 50 m x 50 mm, 50 micras, 24/box	34
8440	PTFE tape, Roll 50 m x 19 mm x 0,1 mm, 0.40 g/cm <sup>3</sup> , 25/box	38
8441	PTFE tape, Roll 50 m x 25 mm x 0,1 mm, 0.52 g/cm <sup>3</sup> , 25/box	38
8442	PTFE tape, Roll 12 m x 12 mm x 0,075mm, 0.35 g/cm <sup>3</sup> , 250/box	38
8443	Self-amalgamating tape, Roll 9 m x 19 mm, 22/box	35
8444	Self-amalgamating tape, Roll 2,5 m x 19 mm, 24/box	35
8448	Signal tape, Roll 200 m x 70 mm, 12/box	40
8456	PTFE tape, Roll 12 m x 12 mm x 0,1 mm, 0.35 g/cm <sup>3</sup> , 250/box	38

Ref.	Product	Pág.
8457	PTFE tape, Roll 50 m x 19 mm x 0,1 mm, 0.52 g/cm <sup>3</sup> , 25/box	38
8459	Packing tape, Roll 132 m x 50 mm, BROWN, 36/box	40
8460	Packing tape, Roll 132 m x 50 mm, TRANSPARENT, 36/box	40
8463	Packing tape, Roll 66 m x 50 mm, BROWN, 36/box	40
8464	Packing tape, Roll 66 m x 50 mm, TRANSPARENT, 36/box	40
8465	Aluminium tapes Aluminium tape, roll 10 m x 50 mm, 30 micras	34
8466	Electrical PVC tape, Roll 15 m x 19 mm, 24/box	40
8477	PTFE tape, Roll 12 m x 12 mm x 0,1 mm, 0.70g/cm <sup>3</sup> , 250/box	38
8482	Aluminium tapes Aluminium tape, roll 50 m x 50 mm, 50 micras	34
8490	Aluminium tapes, Roll 10 m x 50 mm, 30 micras, 24/box	34
8492	PTFE tape, Roll 25 m x 25 mm x 0,2 mm, 0.40 g/cm <sup>3</sup> , 25/box	38
8499	Aluminium tapes, Roll 50 m x 50 mm, 30 micras, 24/box	34
8501	Sanitary silicone Cartridge 300 ml, WHITE	44
8502	Sanitary silicone Cartridge 300 ml, TRANSLUCENT	44
8505	MS polymer sealant, multipurpose Cartridge 280 ml	46
8506	MS polymer sealant, multipurpose Cartridge 280 ml	46
8524	Pools MS Sealant. Tube 150g	46
8526	Neutral silicone Cartridge 300 ml, WHITE	44
8527	Neutral silicone Cartridge 300 ml, TRANSLUCENT	44
8585	Multipurpose silicone Cartridge 280 ml, WHITE	45
8586	Multipurpose silicone Cartridge 280 ml, TRANSLUCENT	45
8608	ANAEROBIC ADHESIVE NUT LOCK, Bottle 50 ml	61
8609	ANAEROBIC ADHESIVE GASKET SEALANT, Bottle 50 ml	61
8612	ANAEROBIC ADHESIVE SCREW LOCK, Bottle 50 ml	61
8614	ANAEROBIC ADHESIVE AXLE RETAINER, Bottle 50 ml	61
8615	ANAEROBIC ADHESIVE BALL BEARINGS, Bottle 50 ml	61
8616	ANAEROBIC ADHESIVE STUD LOCK, Bottle 50 ml	61
8628	ANAEROBIC ADHESIVE THREAD LOCK, Bottle 50 ml	61
8629	ANAEROBIC ADHESIVE HYDRAULIC, Bottle 50 ml	61
8637	Thread sealant, Squeezy bottle 50 ml, 12/box	26
8641	Thread sealant, Squeezy bottle 250 ml, 6/box	26
8642	Chemical welder, Bottle with individual box 10 ml, 24/box	28
8645	ANAEROBIC ADHESIVE STUD LOCK, Bottle 50 ml	61
8663	Thread sealant, Squeezy bottle 75 ml, 12/box	26
8701	Polyurethane foam Spray 750 ml	47
8702	Polyurethane foam Gun Spray 750 ml	47
8704	Polyurethane Foam Cleaner Spray 500 ml	47
8705	Polyurethane Foam Cleaner Caulking gun cleaner	47
8950	Display stand, 1 m x 2 m x 0.5 m	42
C01540	Desincrustante para trituradores de WC, Garrafa 5 L, 3/box	23
C02220	Drain cleaner, Bottle 1 L, 10/box	24
C02430	Concentrated Caustic Soda Pipe Unblocker, Bottle 500ml, 12/box	24
	CPVC Pro, Plastic pot with brush, 250 ml	17
	CPVC Pro, Plastic pot with brush, 500 ml	17
	CPVC Pro, Plastic pot with brush, 1 L	17
	PVC Cement REGULARASTM Metal can with cotton ball applicator, 118ml (4 fl.oz. 1/4 pint), CLEAR / TRANSPARENTE2	18
	PVC Cement MEDIUMASTM Metal can with cotton ball applicator, 946ml (32 fl.oz. 1 quart) CLEAR / TRANSPARENTE 12/box	18
	PVC Cement MEDIUMASTM Metal can with cotton ball applicator, 946ml (32 fl.oz. 1 quart) GRAY / GRIS 12/box	18
	PVC Cement HEAVYASTM Metal can with cotton ball applicator, 118ml (4 fl.oz. 1/4 pint), GRAY / GRIS2 4/box	18
	CPVC Cement MEDIUMASTM Metal can with cotton ball applicator, 118ml (4 fl.oz. 1/4 pint), ORANGE / NARANJA 24/box	19
	CPVC Cement MEDIUMASTM Metal can with cotton ball applicator, 237ml (8 fl.oz. 1/2 pint), ORANGE / NARANJA 24/box	19
	CPVC Cement MEDIUMASTM Metal can with cotton ball applicator, 473ml (16 fl.oz. 1 pint), ORANGE / NARANJA 1/2 box	19
	CPVC Cement MEDIUMASTM Metal can with cotton ball applicator, 946ml (32 fl.oz. 1 quart), ORANGE / NARANJA 12/box	19
	CPVC Cement HEAVY ASTM Metal can with cotton ball applicator, 118ml (4 fl.oz. 1/4 pint), ORANGE / NARANJA 24/box	19
	CPVC Cement HEAVY ASTM Metal can with cotton ball applicator, 237ml (8 fl.oz. 1/2 pint), ORANGE / NARANJA 24/box	19
	CPVC Cement HEAVY ASTM Metal can with cotton ball applicator, 473ml (16 fl.oz. 1 pint), ORANGE / NARANJA 1/2 box	19
	CPVC Cement HEAVY ASTM Metal can with cotton ball applicator, 946ml (32 fl.oz. 1 quart), ORANGE / NARANJA 12/box	19



**UNECOL ADHESIVE IDEAS, S.L.**

Parque Ind. Juan Carlos I  
Avda. de la Foia, 44  
46440 Almussafes  
(VALENCIA)

Tel. +34 961 767 234  
Fax. +34 961 794 442

**[www.unecol.com](http://www.unecol.com)**